
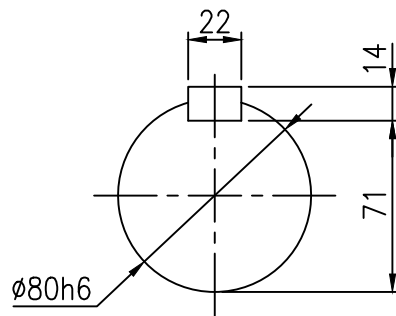
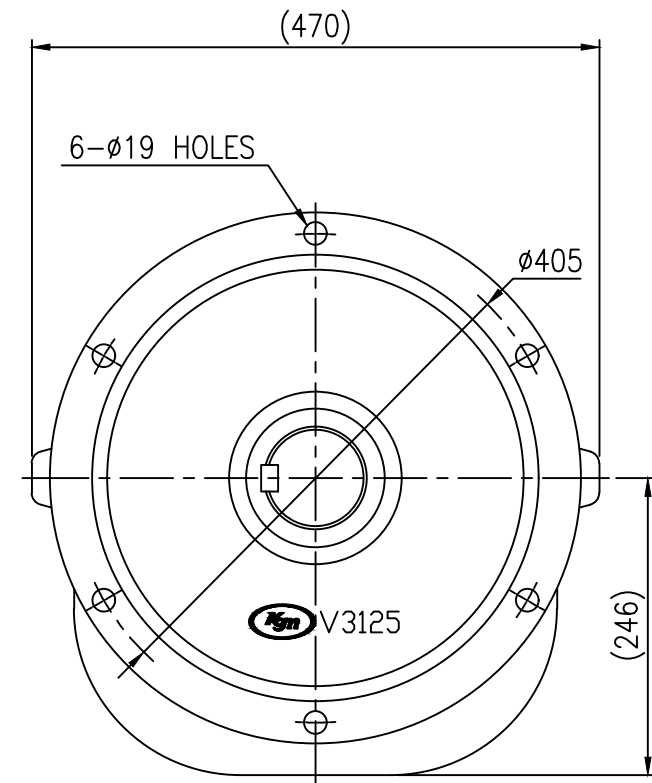


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

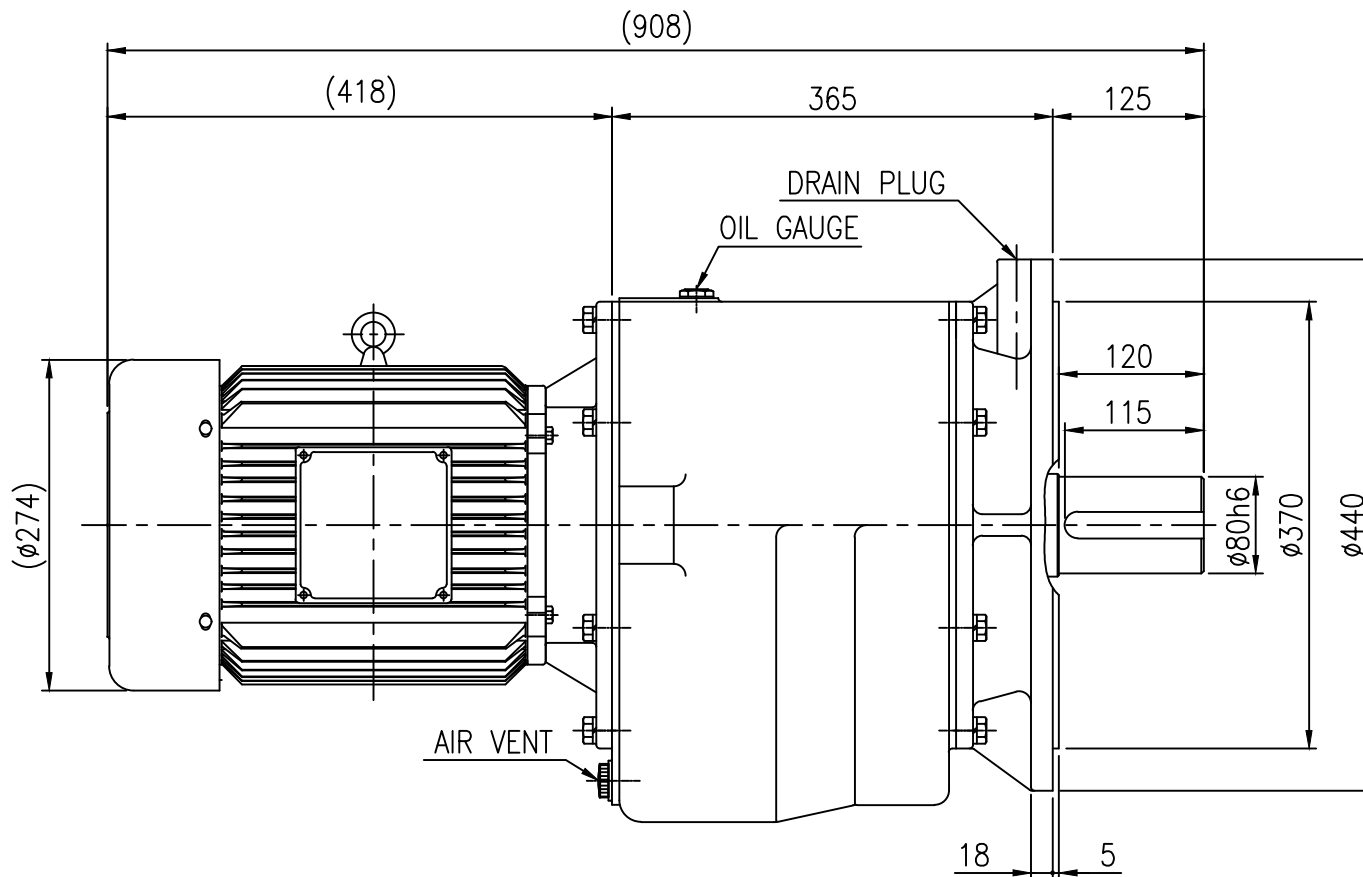

OUTPUT SHAFT

KD V2553	CAPACITY(Kw)	7.5kw4P			5.5kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	350					

TOOTH CHAMPERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0					1000 이상 : ±0.5
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)		

() 내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER KD V2553				
	7.5KW 4P IE3 I=1/40~1/60		STANDARD TYPE				
	OUTLINE DIMENSION						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.01	PROJECTION	1		
CHECKED		REF. No.	KD V2553	REV No.			
APPROVED		DRAWING No.	KDV2553-10-40~80-0D				

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3



(주) 케이 지 엠
KOREA GEARED MOTOR