
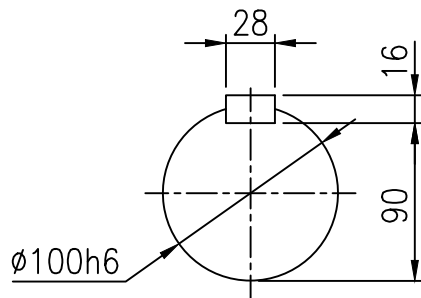
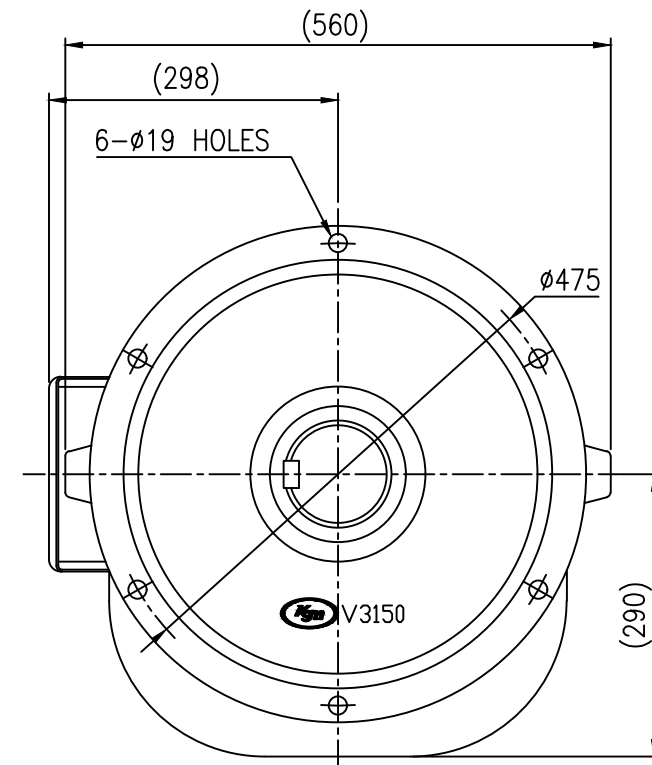


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

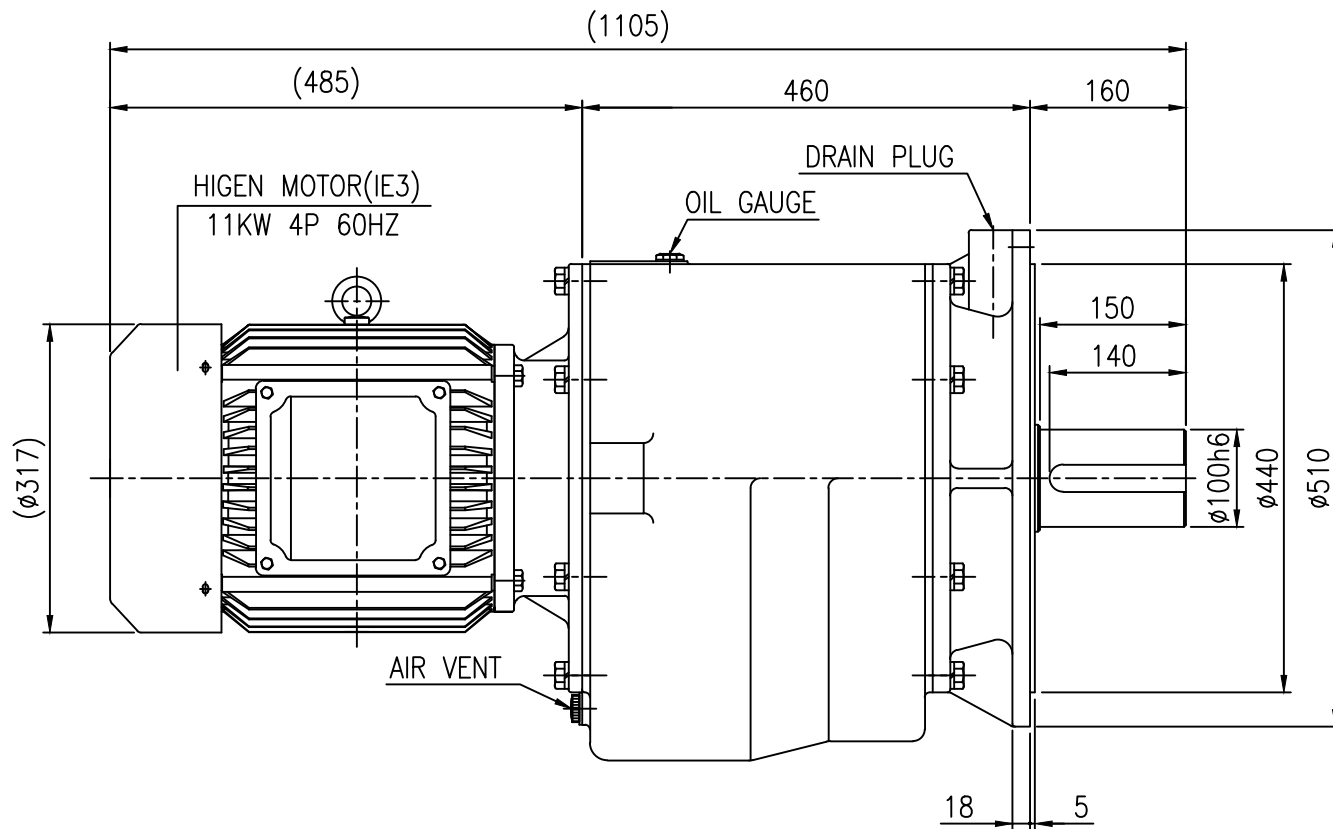

OUTPUT SHAFT

KD V3003	CAPACITY(Kw)	11kw4P			7.5kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	490					

TOOTH CHAMFERING		MODULE						표기와 일반 공차	
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0				각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0				CHAMFER: C1.0	30 - 120: ±0.15
HC & HQ. I	C1	0.5	1.0	2.0				FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0				마무리: ▽	315 - 1000 : ±0.3
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1000 이상 : ±0.5	

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER KD V3003				
	11KW 4P IE3 I=1/40~1/60		STANDARD TYPE				
	OUTLINE DIMENSION						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.01	PROJECTION	1st		
CHECKED		REF. No.	KD V3003	REV No.			
APPROVED		DRAWING No.	KDV3003-15-40~80-0D				
		(주) 케이 지 엠					
		KOREA GEARED MOTOR					

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3