
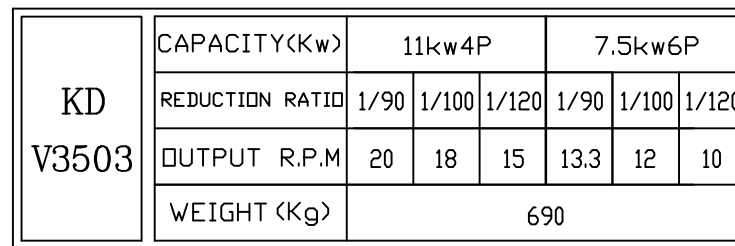


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

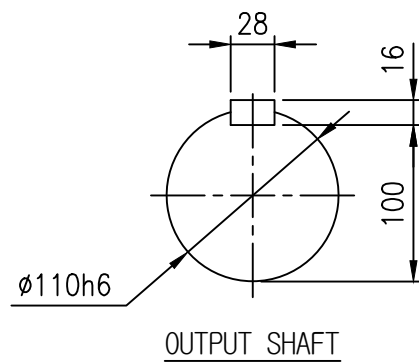

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.1
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)

()내의 치수는 다소 변경될수 있음.

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR 11KW 4P IE3 I=1/90~1/120				CUSTOMER				
	OUTLINE DIMENSION				KD V3503				
					STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1		UNIT	MM			
DESIGN	YHH	DATE	2020.12.01		PROJECT				
CHECKED		REF. No.	KD V3503		REV				
APPROVED		DRAWING No.	KDV3503-15-90~120-OD						
 (주) 케이 지 엠 KOREA GEARED MOTOR									