
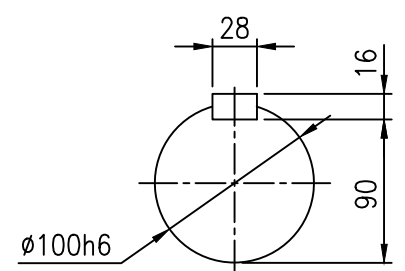
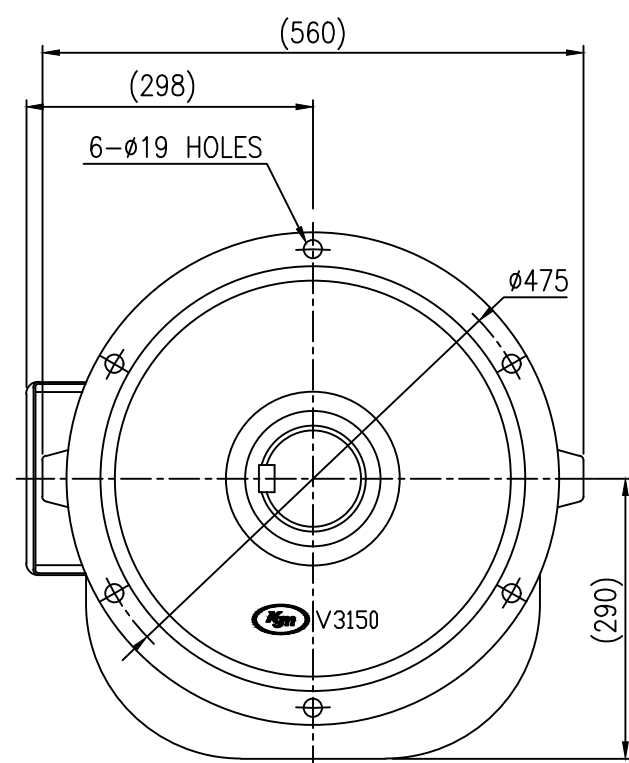


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

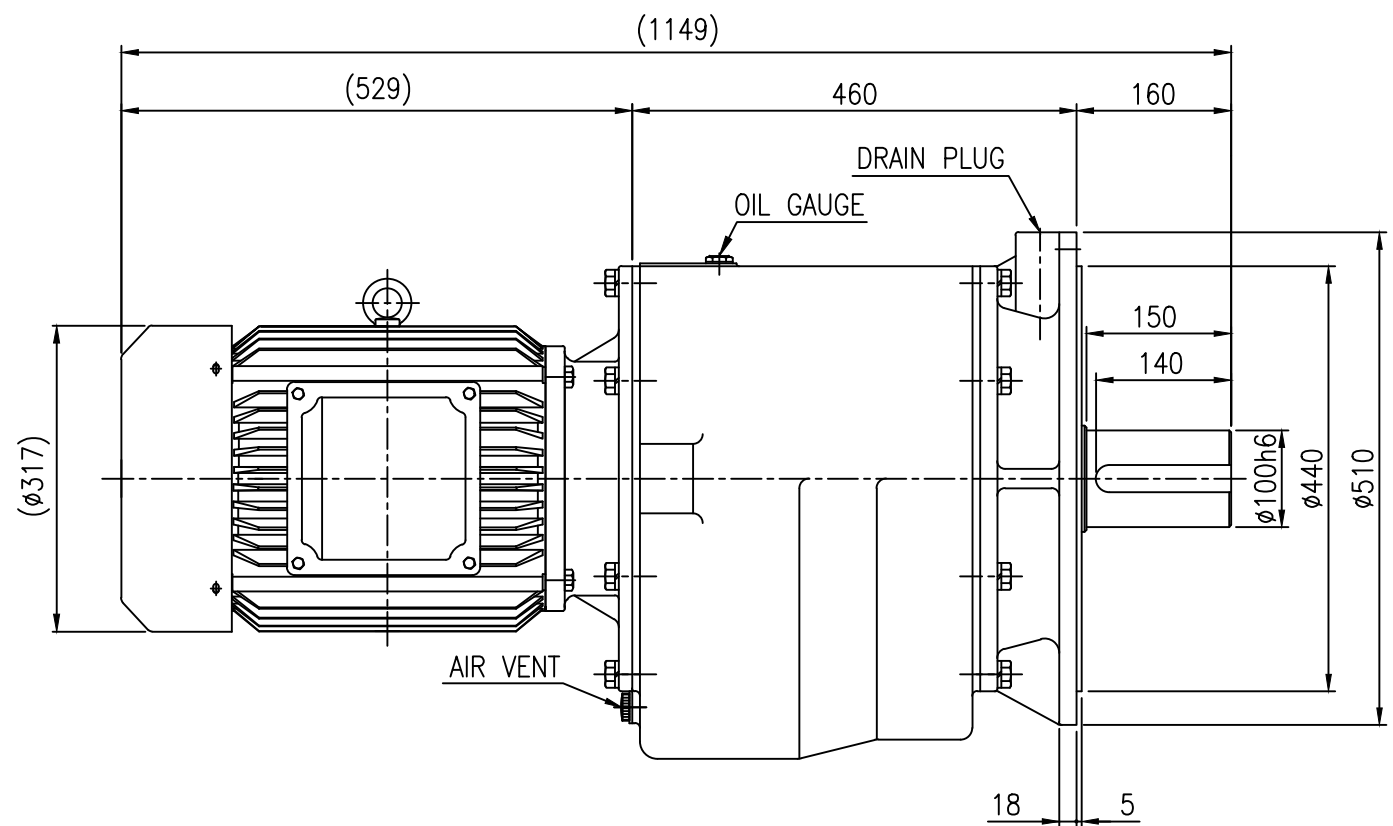

OUTPUT SHAFT

KD V3003	CAPACITY(Kw)	15kw4P			11kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	530					

()내의 치수는 다소 변경될수 있음.

M5*0.8
M6*1
M8*1.25
M10*1.5
M12*1.75
M16*2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMFERING	MODULE			표기	표기	표기	표기
	5	5-15	15				
HQ. T	C1	0.2	0.5	1.0	표기	표기	표기
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0	표기	표기	표기
	C2	2.0	3.0	5.0			

OUT LINE DWG		SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
No.	DESCRIPTION	SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
TITLE SPEC.		KDV GEARED MOTOR 15KW 4P IE3 I=1/40~1/60 OUTLINE DIMENSION		CUSTOMER		KD V3003 STANDARD TYPE		1 / 1		UNIT	
DRAWN		KSS		SCALE		DATE		2020.12.01		PROJECTION	
DESIGN		YHH		REF. No.		KD V3003		REV No.		△	
CHECKED				DRAWING No.		KDV3003-20-40~60-0D					
APPROVED											



(주) 케이 지 엠
KOREA GEARED MOTOR