
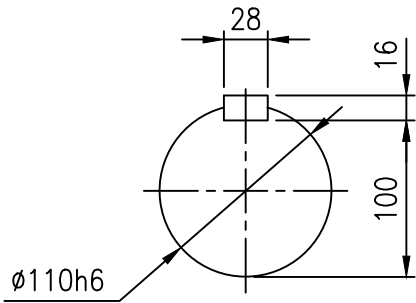


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

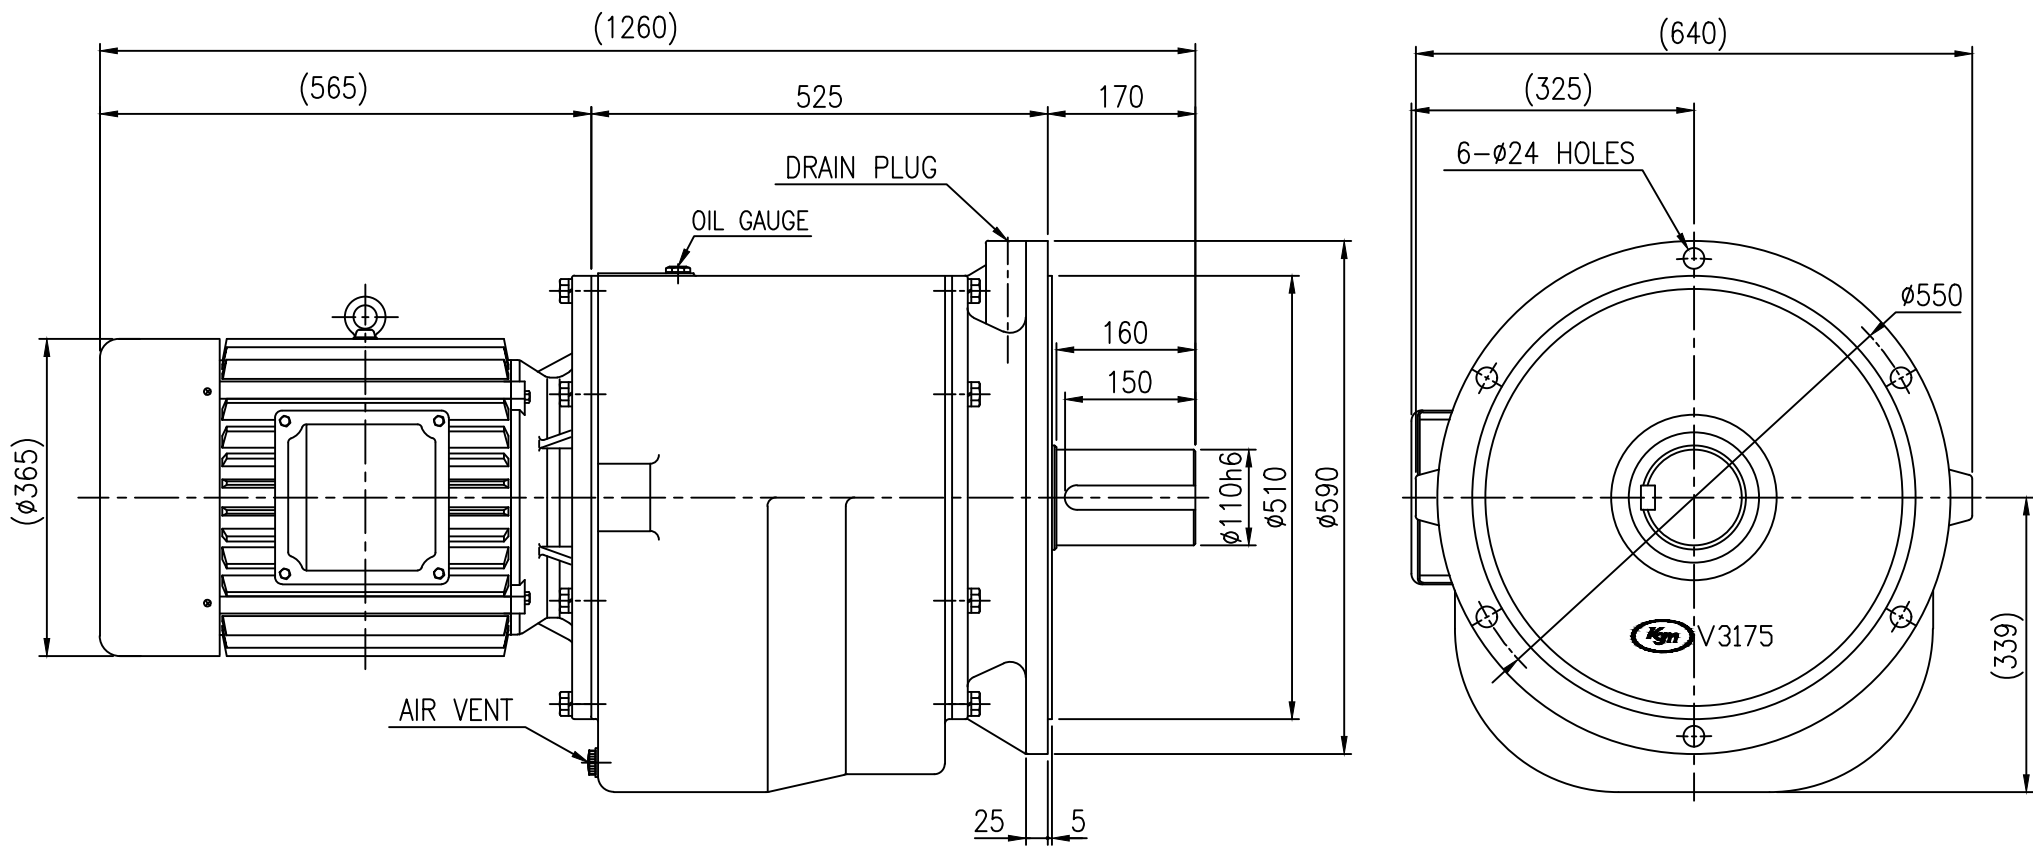

KD V3503	CAPACITY(Kw)	22kw4P			15kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	740					

() 내의 치수는 다소 변경될수 있음.

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

TOOTH CHAMPERING		M O D U L E			표기	표기	표기	표기	표기
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0	표기	표기	표기	표기	표기
	C2	1.0	1.5	2.0					
HC & HQ. I	C1	0.5	1.0	2.0	표기	표기	표기	표기	표기
	C2	2.0	3.0	5.0					

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER KD V3503				
	22KW 4P IE3 I=1/40~1/60		STANDARD TYPE				
	OUTLINE DIMENSION						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.01	PROJECTION	1st Angle		
CHECKED		REF. No.	KD V3503	REV No.			
APPROVED		DRAWING No.	KDV3503-30-40-60-0D				



(주) 케이 지 엠
KOREA GEARED MOTOR