
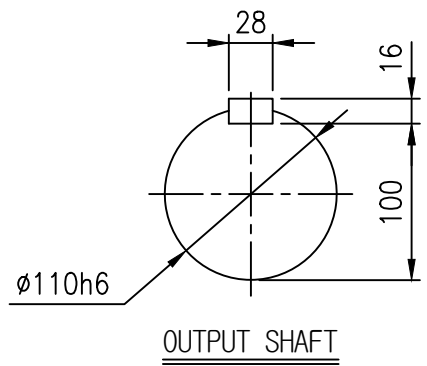
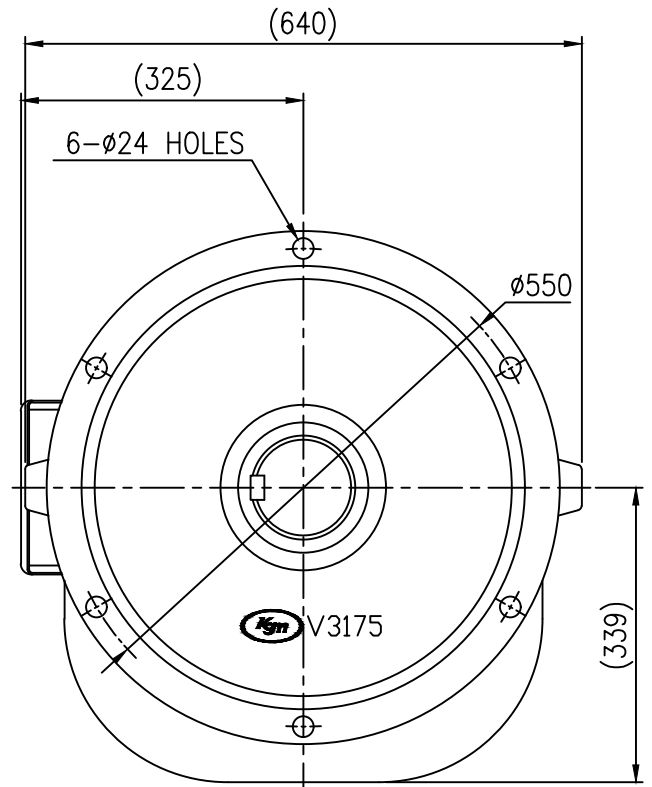


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

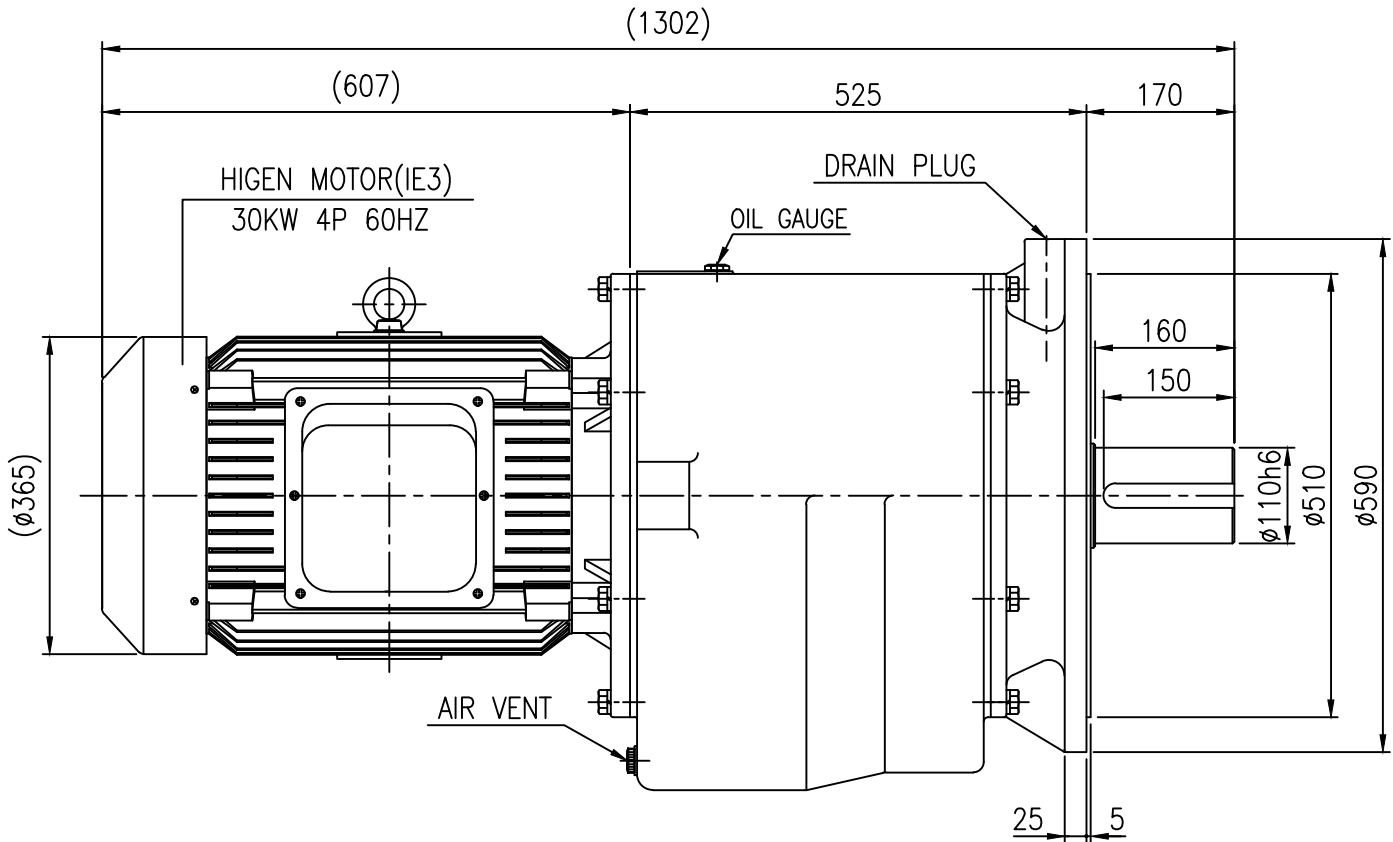

KD V3503	CAPACITY(Kw)	30kw4P			22kw6P		
	REDUCTION RATIO		1/25	1/30		1/25	1/30
	OUTPUT R.P.M		72	60		48	40
	WEIGHT (Kg)	765					

TOOTH CHAMFERING		M O D U L E						표기 및 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 ~ 1000 : ±0.
	C2	2.0	3.0	5.0					1000 이상 : ±0.
					M<8(R0.1~1M)	M=8~15(R0.3M)	M>15(R0.3M)		

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER				
	30KW 4P IE3 I=1/25~1/30		KD V3503				
	OUTLINE DIMENSION		STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.01	PROJECTION	1		
CHECKED		REF. No.	KD V3503	REV. No.			
APPROVED		DRAWING No.	KDV3503-40-25-30-0D				

- M5±0.8
- M6±1
- M8±1.25
- M10±1.5
- M12±1.75
- M16±2
- M18±2.5
- M20±2.5
- M22±2.5
- M24±3



(주) 케이 지 엠
KOREA GEARED MOTOR