

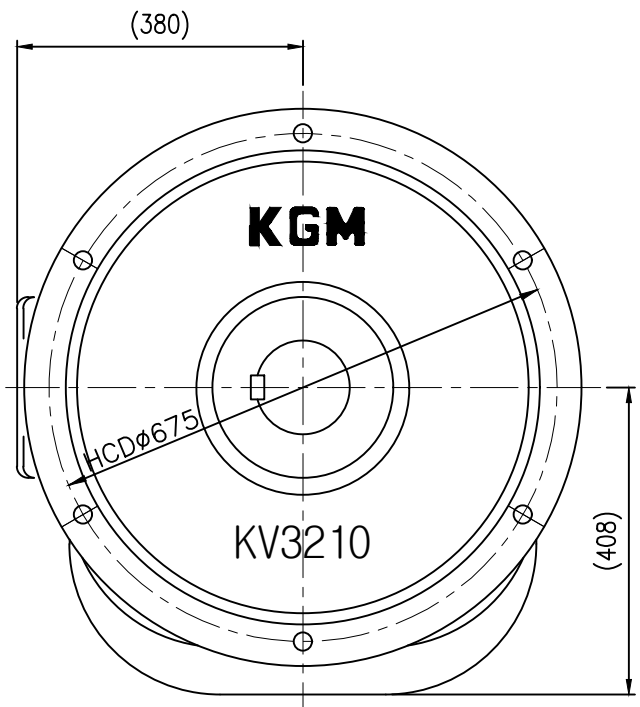


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

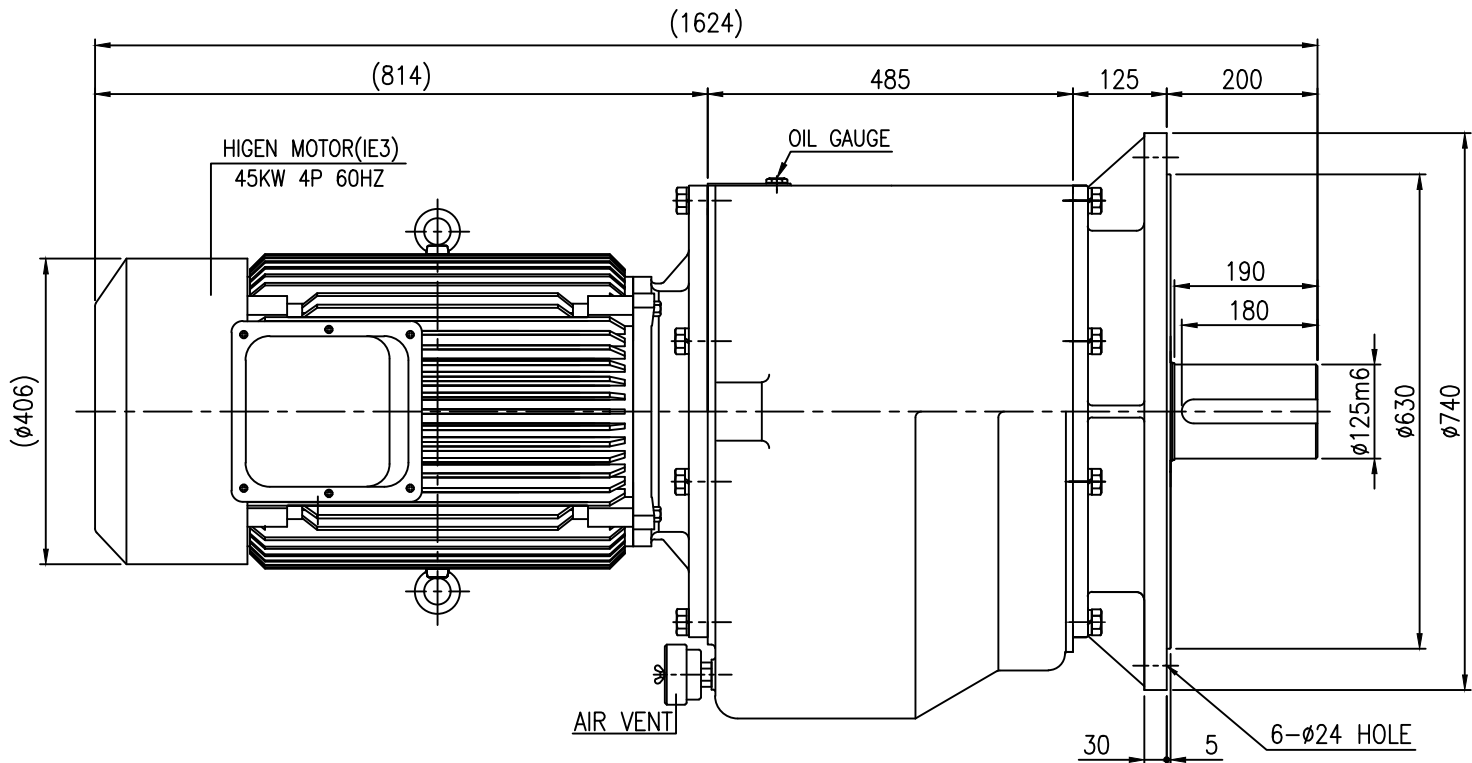

OUTPUT SHAFT

KD V4203	CAPACITY(Kw)	45kw4P		37kw6P	
	REDUCTION RATIO		1/25 1/30		1/25 1/30
	OUTPUT R.P.M		72 60		48 40
	WEIGHT (Kg)	1100			

()내의 치수는 다소 변경될수 있음.

- M5±0.8
- M6±1
- M8±1.25
- M10±1.5
- M12±1.75
- M16±2
- M18±2.5
- M20±2.5
- M22±2.5
- M24±3

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)