
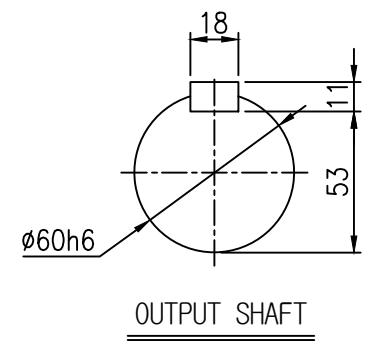
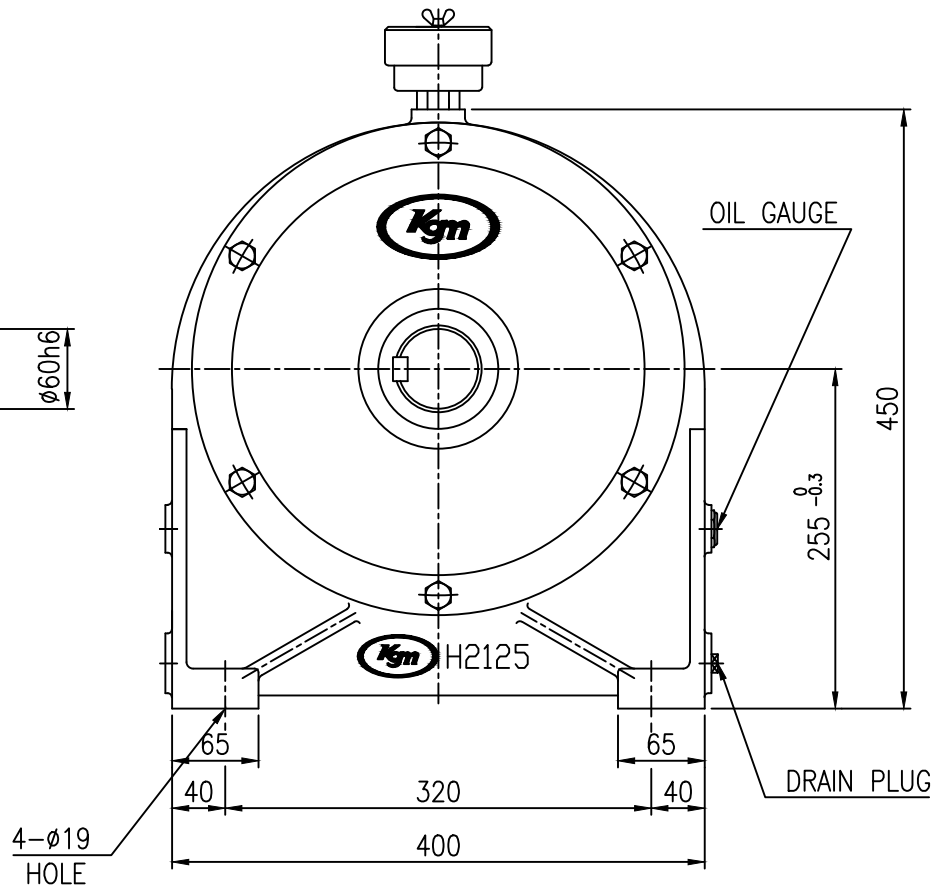


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

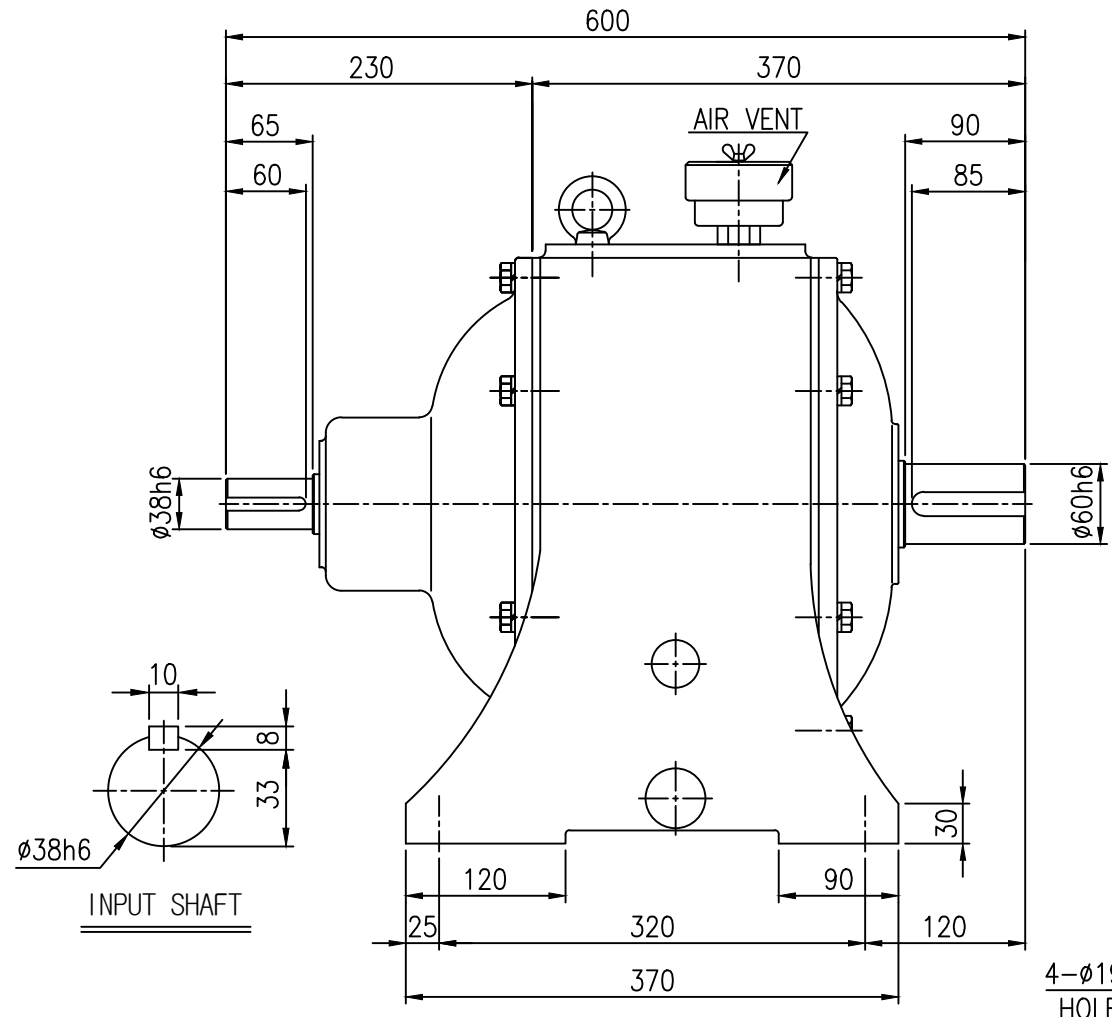

KD-HL H2552	CAPACITY(Kw)	5.5kw4P		3.7kw6P	
	REDUCTION RATIO	1/25	1/30	1/25	1/30
	OUTPUT R.P.M	72	60	48	40
	WEIGHT (Kg)	175			

TOOTH CHAMFERING	MODULE				표기 및 일반 공차
	5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°
	C2	1.0	1.5	2.0	
HC & HQ. I	C1	0.5	1.0	2.0	CHAMFER: C1.0
	C2	2.0	3.0	5.0	

OUT LINE DWG					
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T
TITLE SPEC.		KD-HL LINE POWER 5.5KW 4P I=1/25~1/30		CUSTOMER KD-HL H2552	
DESIGN		DATE		PROJECTION	
CHECKED		REF. No.		REV No.	
APPROVED		DRAWING No.		REMARK	
KSS		SCALE		UNIT	
KD-HL H2552		2018.09.07		1 / 1	
KDHL-H2552-7.5-25-30-0D		KD-HL H2552		STANDARD TYPE	
KSS		DATE		UNIT	
KDHL-H2552-7.5-25-30-0D		KD-HL H2552		STANDARD TYPE	

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3