




NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

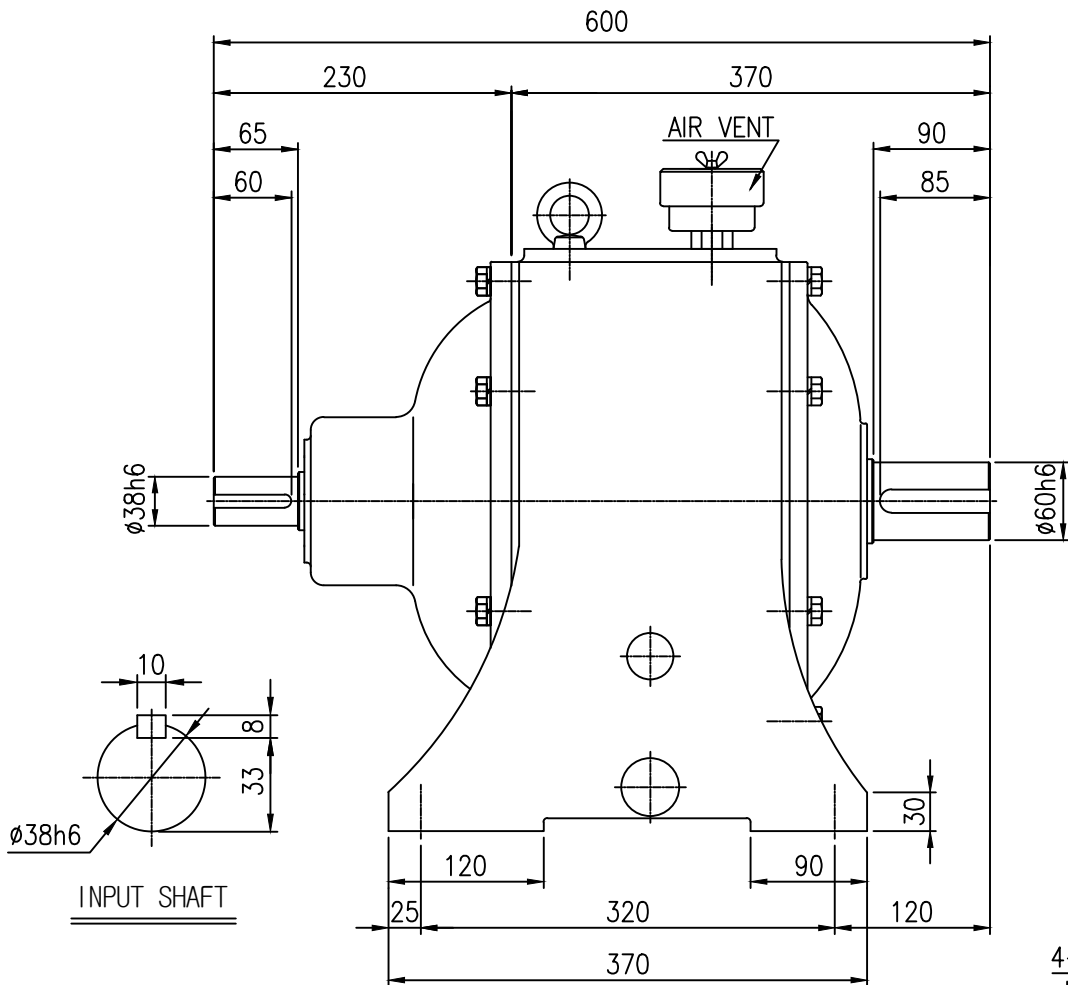


INPUT SHAFT



OUTPUT SHAFT

KD-HL H2552	CAPACITY(Kw)	7.5kw4P			5.5kw6P		
	REDUCTION RATIO	1/10	1/20	1/30	1/10	1/20	1/30
	OUTPUT R.P.M	180	90	60	120	60	40
	WEIGHT (Kg)	180					

TOOTH CHAMPERING		MODULE			표기 및 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 타인에게 누설할 수 없습니다.
		5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120 : ±0.15
HC & HQ. I	C1	0.5	1.0	2.0	FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ∇	315 - 1000 : ±0.3
					1000 이상 : ±0.5	

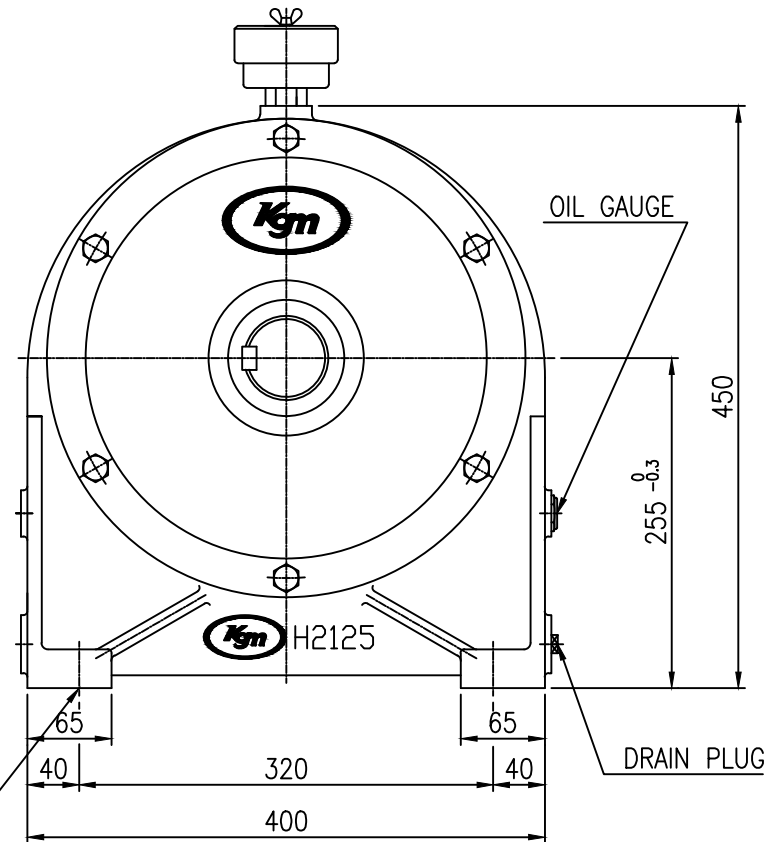

OIL GAUGE

DRAIN PLUG

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KD-HL LINE POWER		CUSTOMER KD-HL H2552				
	7.5KW 4P I=1/10~1/30		STANDARD TYPE				
	OUTLINE DIMENSION						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN		DATE	2018.09.07	PROJECTION	1st		
CHECKED		REF. No.	KD-HL H2552	REV	No.		
APPROVED		DRAWING No.	KDHL-H2552-10-10-30-0D				

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3



(주) 케이 지 엠
KOREA GEARED MOTOR