


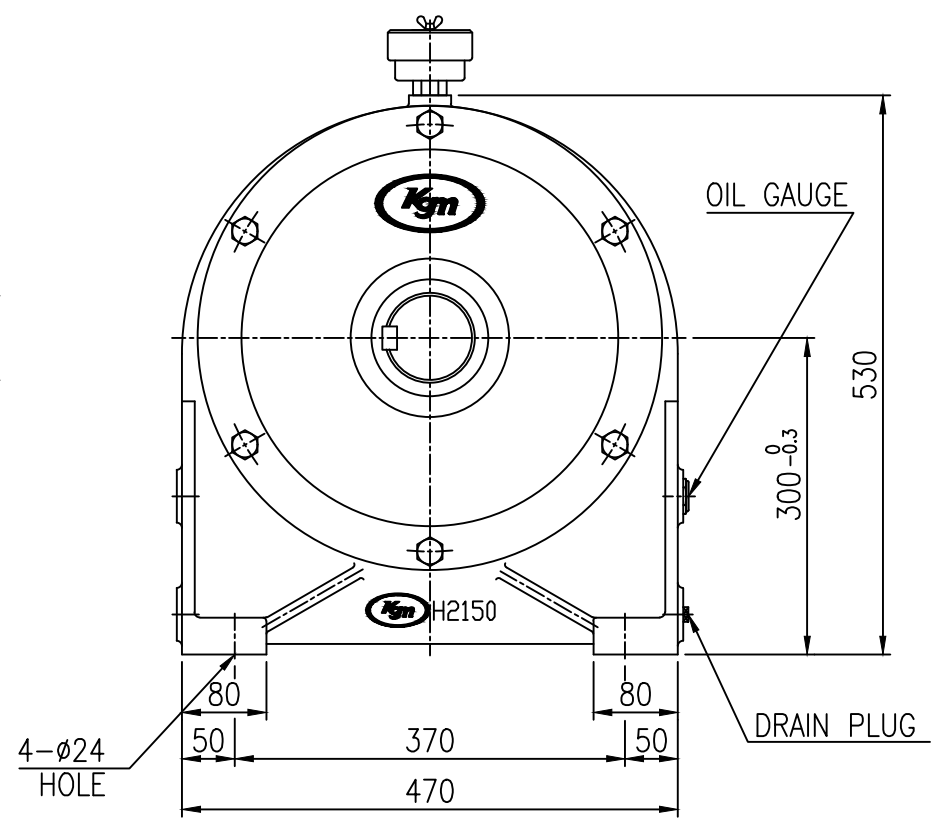


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

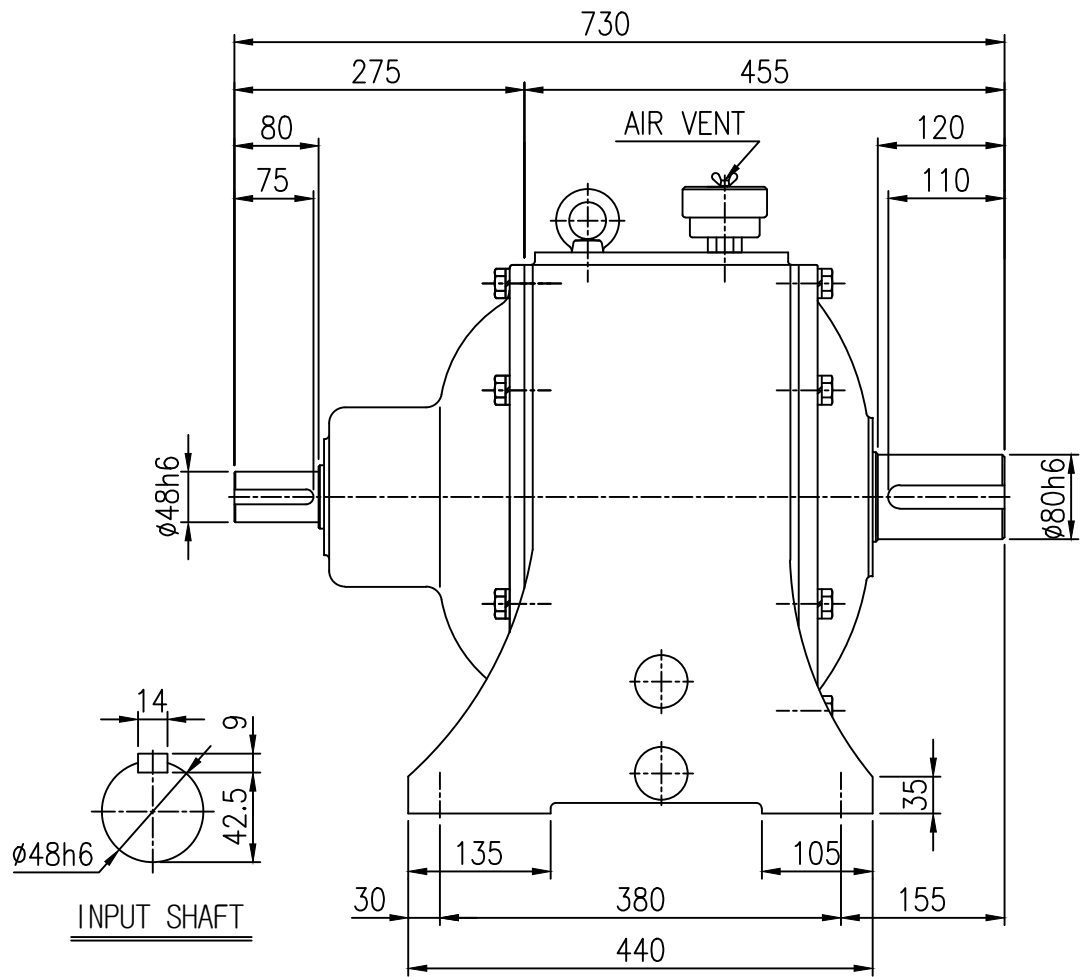

KD-HL H3002	CAPACITY(Kw)	22kw4P			15kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	285					

TOOTH CHAMPERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				라도 : ±0.2'	6-30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0 30-120 : ±0.1	
	C2	1.0	1.5	2.0				FILLET: R1.0 120-315 : ±0.	
HC & HQ. I	C1	0.5	1.0	2.0				머무림:  315-1000 : ±0.	
	C2	2.0	3.0	5.0				1000 이상 : ±0.	
		M<8(R0.1-1M)			M=8-15(R0.3M)		M>15(R0.3M)		

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KD-HL LINE POWER 22KW 4P I=1/10~1/20		CUSTOMER KD-HL H3002				
	OUTLINE DIMENSION		STANDARD TYPE				
	DRAWN KSS		SCALE		1 / 1 UNIT		
DESIGN	DATE		2018.09.07		PROJECTION		
CHECKED	REF. No.		KD-HL H3002		REV No.		
APPROVED	DRAWING No.		KDHL-H3002-30-10-20-0D				

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3