

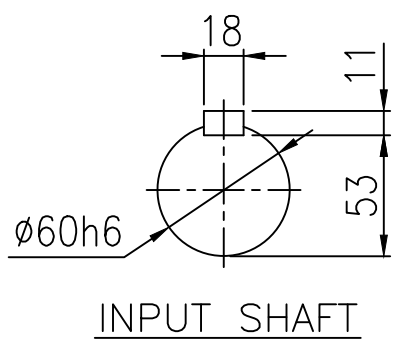



NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

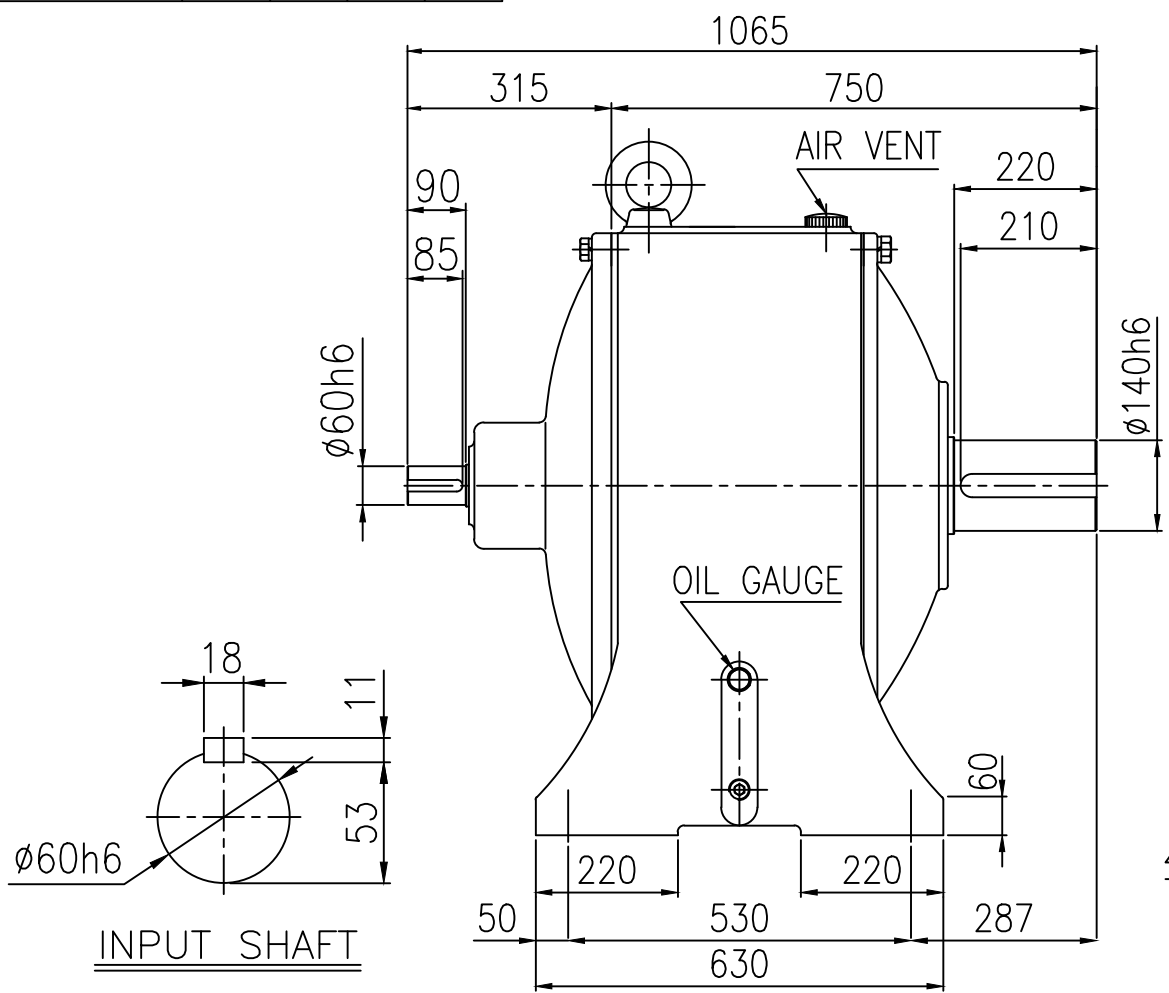

INPUT SHAFT

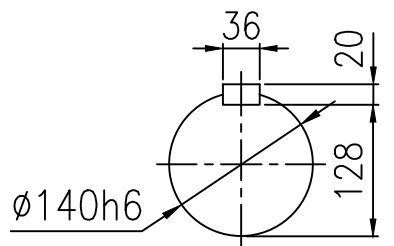

OUTPUT SHAFT

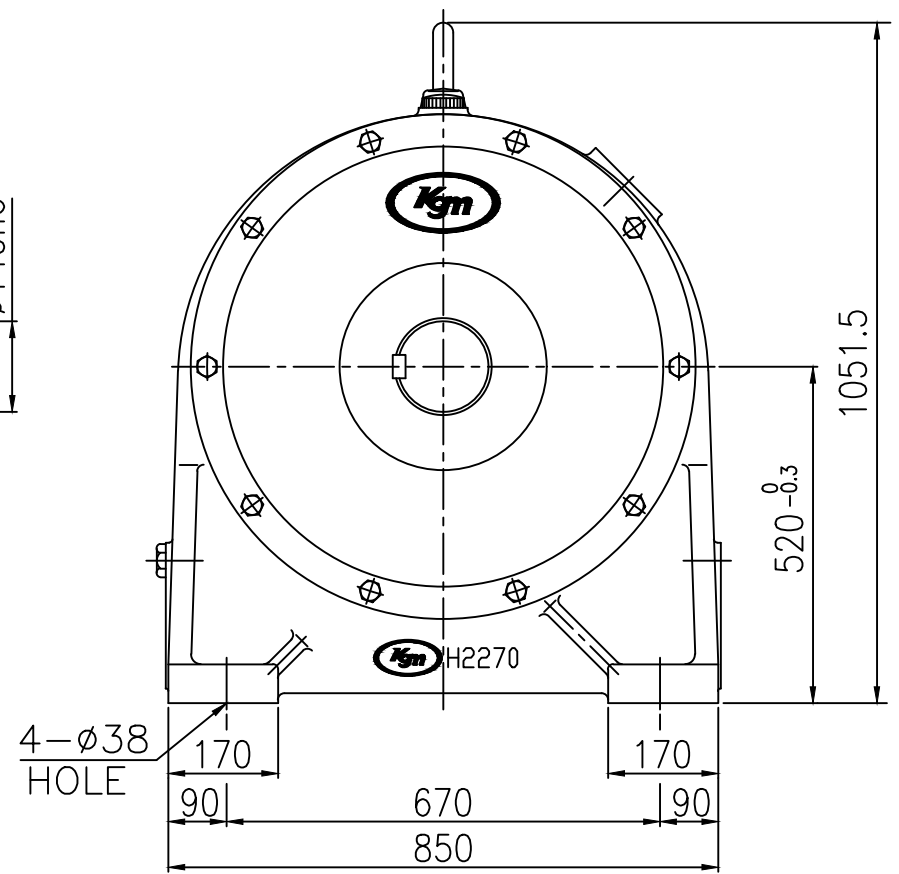

KD-HL H5202	CAPACITY	55kw4P			37kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	750					

TOOTH CHAMFERING	MODULE			표기	표기	표기	표기
	5	5-15	15				
HQ. T	C1	0.2	0.5	1.0	표기	표기	표기
	C2	1.0	1.5	2.0			
HC & HQ. I	C1	0.5	1.0	2.0	표기	표기	표기
	C2	2.0	3.0	5.0			

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KD-HL H5202 LINE POWER 55KW 4P I=1/10~1/20			CUSTOMER KD-HL H5202			
	OUTLINE DIMENSION			STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	MM		
DESIGN		DATE	2019.05.16	PROJECTION			
CHECKED		REF. No.	KD-HL H5202		REV	No.	
APPROVED		DRAWING No.	KDHL-H5202-75-10-20-0D				

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3



(주) 케이 지 엠
KOREA GEARED MOTOR