
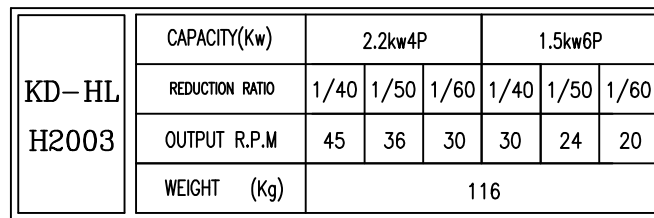


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

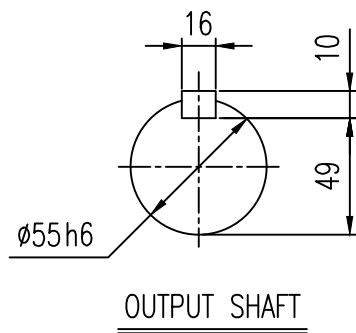

TOOTH CHAMFERING		M O D U L E						표기예와 일반 공차	
		5	5~15	15				각도 : $\pm 0.2^{\circ}$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리 : ▽	315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0				M<B(R0.1-1M)	M=8-15(R0.3M)

	OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KD-HL LINE POWER		CUSTOMER KD-HL H2003				
	2.2KW 4P I=1/40~1/60						
	OUTLINE DIMENSION		STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN		DATE	2018.09.07	PROJECTION			
CHECKED		REF. No.	KD-HL H2003		REV. No.		
APPROVED		DRAWING No.	KDHL-H2003-03-40-80-0D				
		(주) 케이지엠 KOREA GEARED MOTOR					