



M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

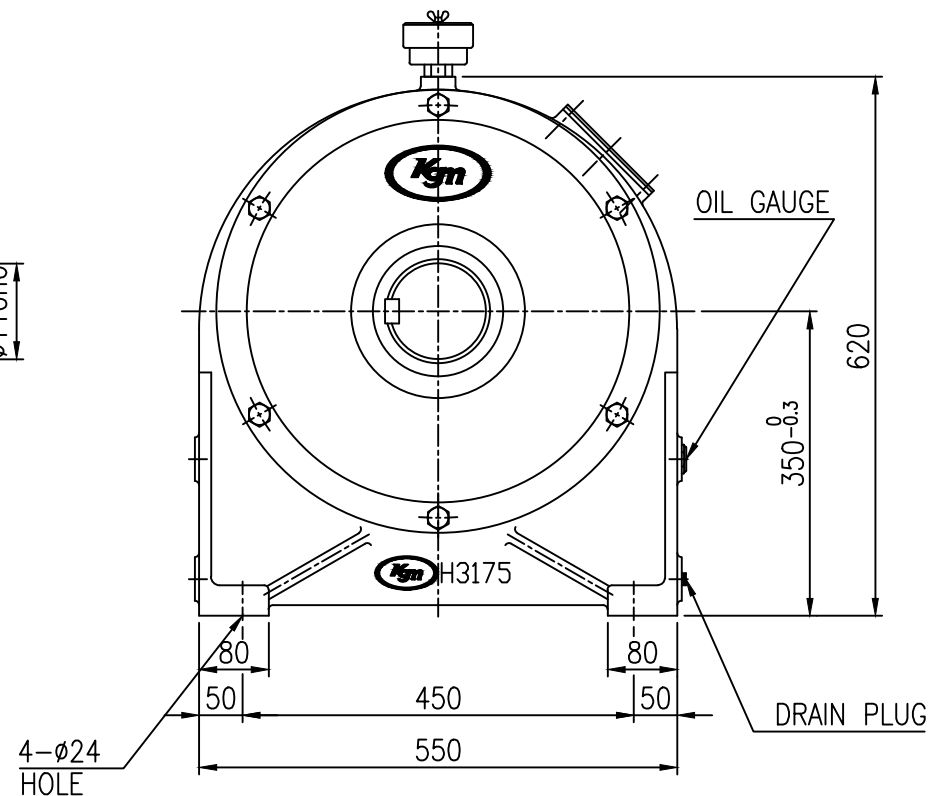

TOOTH CHAMFERING		M O D U L E						표기 및 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				$M < 8(R0.1 \sim 1M)$	$M = 8 \sim 15(R0.3M)$
	C2	2.0	3.0	5.0	1000 이상 : ±0.5				

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDH GEARED MOTOR 11KW 4P I=1/90~1/120				CUSTOMER KD-HL H3503				
	OUTLINE DIMENSION				STANDARD TYPE				
	DRAWN	KSS	SCALE	1 / 1	UNIT	MM			
DESIGN	YHH	DATE	2020.12.15	PROJECTION					
CHECKED	REF. No.		KD-HL H3503			REV			
APPROVED	DRAWING No.		KDH13503-15-90-120-0D			No.			

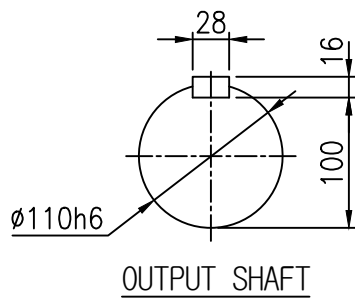

(주) 케이지엠
KOREA GEARED MOTOR