


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

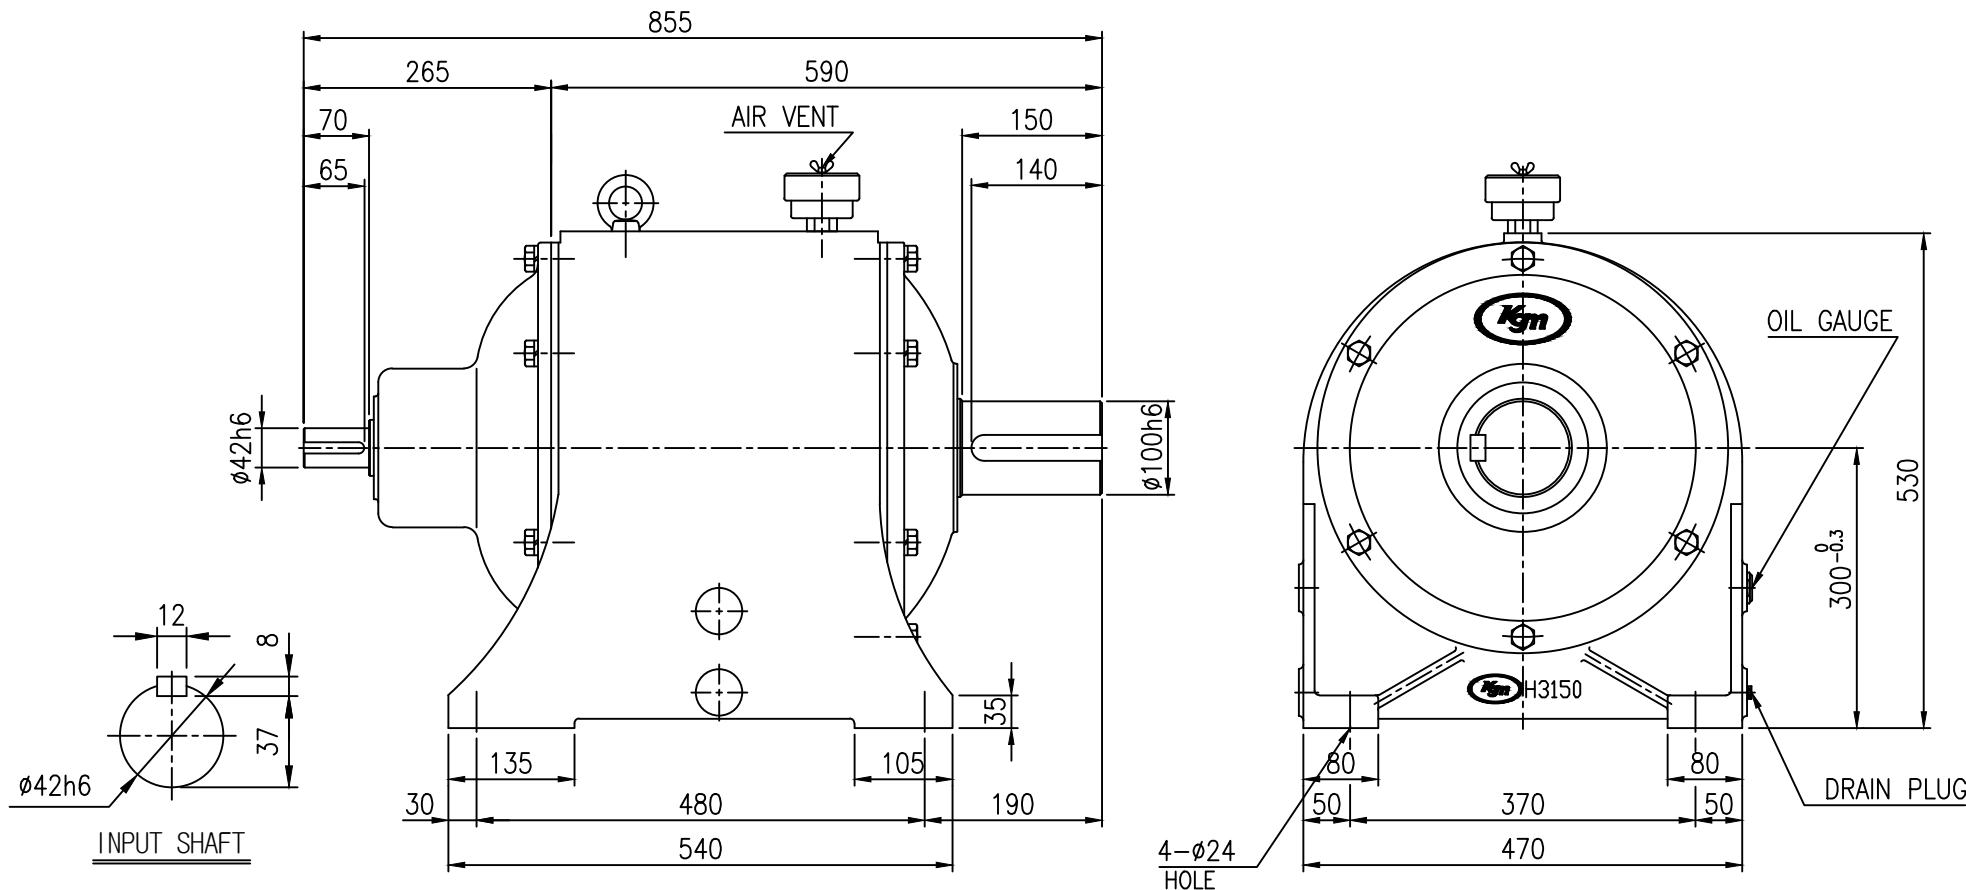

INPUT SHAFT

OUTPUT SHAFT

KD-HL H3003	CAPACITY(Kw)	15kw4P			11kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	365					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0 30 - 120 : ±0.15	
	C2	1.0	1.5	2.0				FILLET: R1.0 120 - 315 : ±0.2	
HC & HQ. I	C1	0.5	1.0	2.0				머무리: ▽ 315 - 1000 : ±0.3	
	C2	2.0	3.0	5.0				1000 이상 : ±0.5	
		M<8(R0.1-1M)			M=8-15(R0.3M)		M>15(R0.3M)		

	OUT LINE DWG								
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KD-HL LINE POWER 15KW 4P I=1/40~1/60			CUSTOMER KD-HL H3003					
	OUTLINE DIMENSION			STANDARD TYPE					
DRAWN	KSS		SCALE		1 / 1		UNIT	MM	
DESIGN			DATE		2018.09.10		PROJECTION	☐ ㉞	
CHECKED			REF. No.		KD-HL H3003		REV	No. △	
APPROVED			DRAWING No.		KDHL-H3003-20-40-80-0D				
 (주) 케이 지 엠 KOREA GEARED MOTOR									

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3