
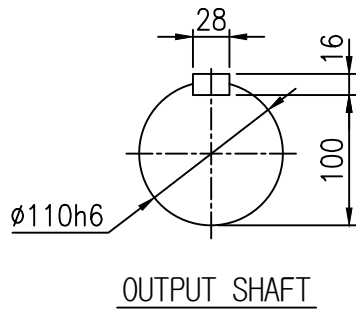


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

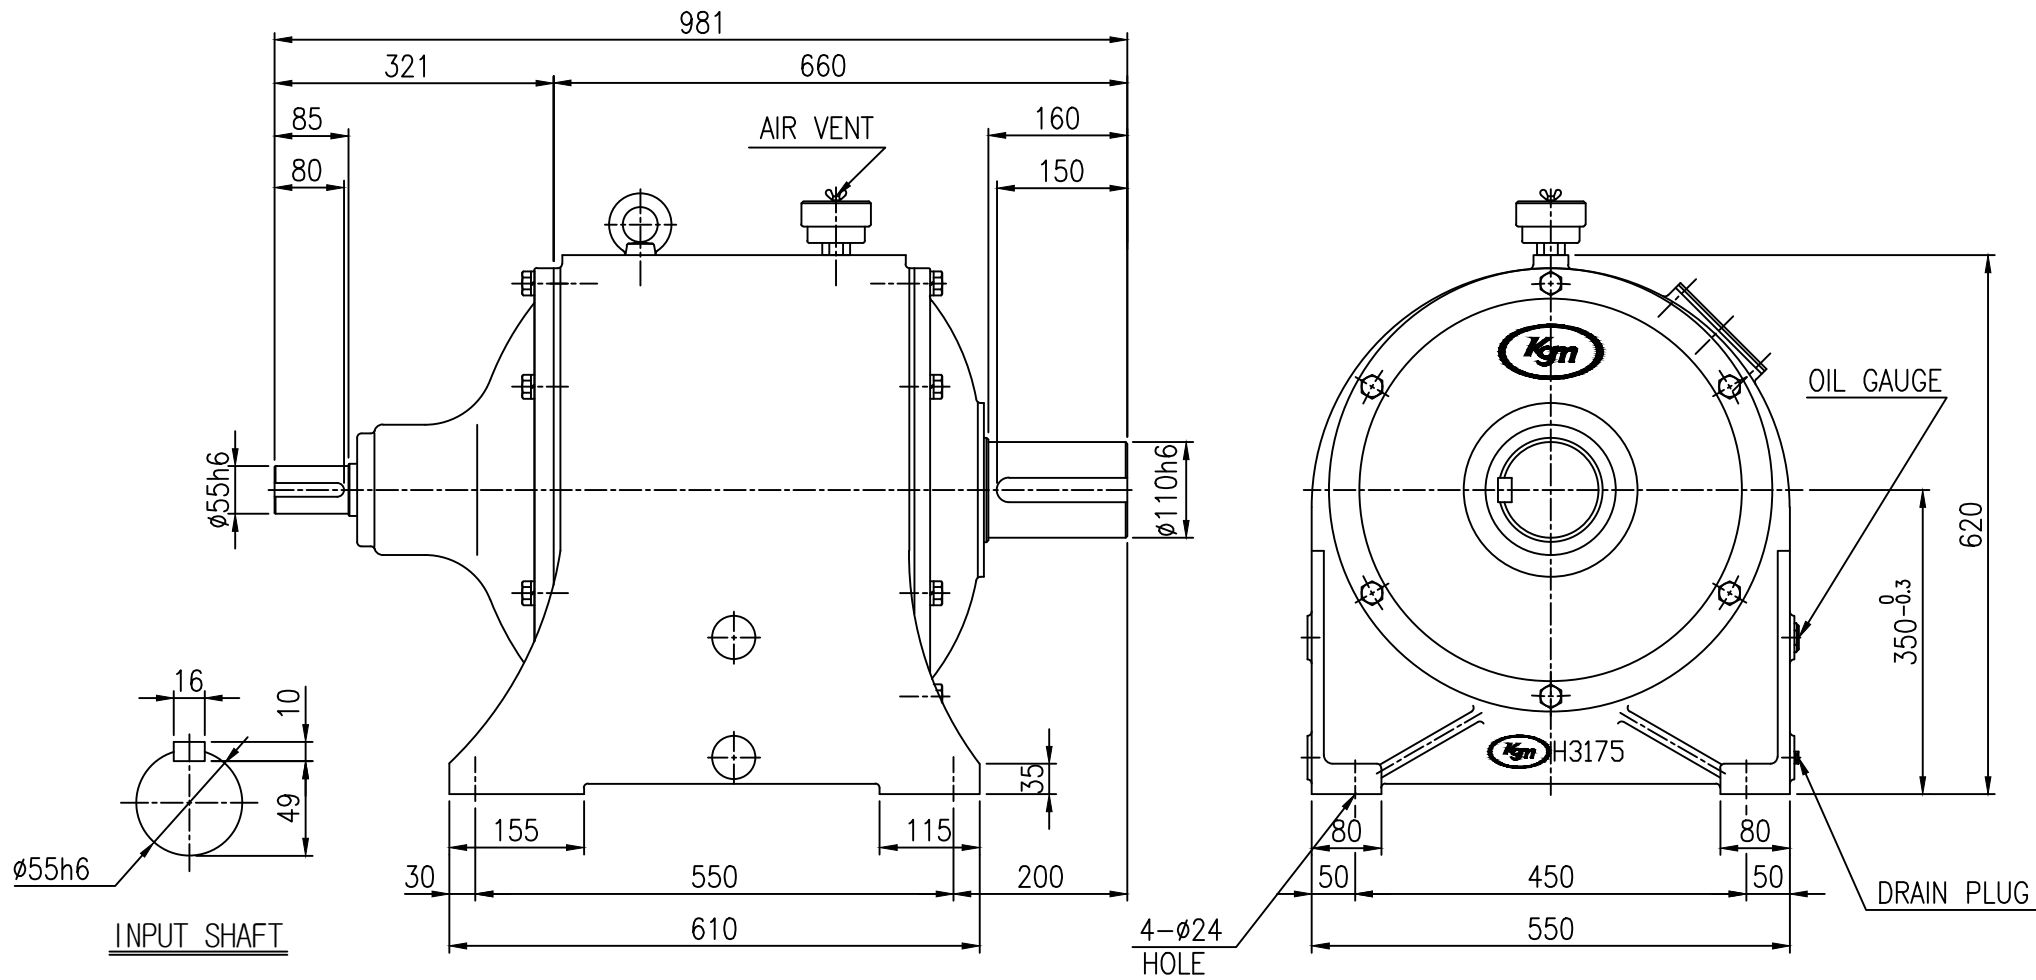

KD-HL H3503	CAPACITY(Kw)	30kw4P		22kw6P	
	REDUCTION RATIO	1/25	1/30	1/25	1/30
	OUTPUT R.P.M	72	60	48	40
	WEIGHT (Kg)	480			

TOOTH CHAMFERING		MODULE			표기 및 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본 세에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포거나, 무단에게 누설할 수 없습니다.
		5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120: ±0.15
HC & HQ. I	C1	0.5	1.0	2.0	FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ▽	315 - 1000 : ±0.3
					1000 이상 : ±0.5	

	OUT LINE DWG							
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KD-HL LINE POWER 30KW 4P I=1/25~1/30			CUSTOMER KD-HL H3503				
	OUTLINE DIMENSION			STANDARD TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm			
DESIGN		DATE	2018.09.10	PROJECTION				
CHECKED		REF. No.	KD-HL H3503		REV No.			
APPROVED		DRAWING No.	KDHL-H3503-40-25-30-0D					
 (주) 케이 지 엠 KOREA GEARED MOTOR								

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3