



NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

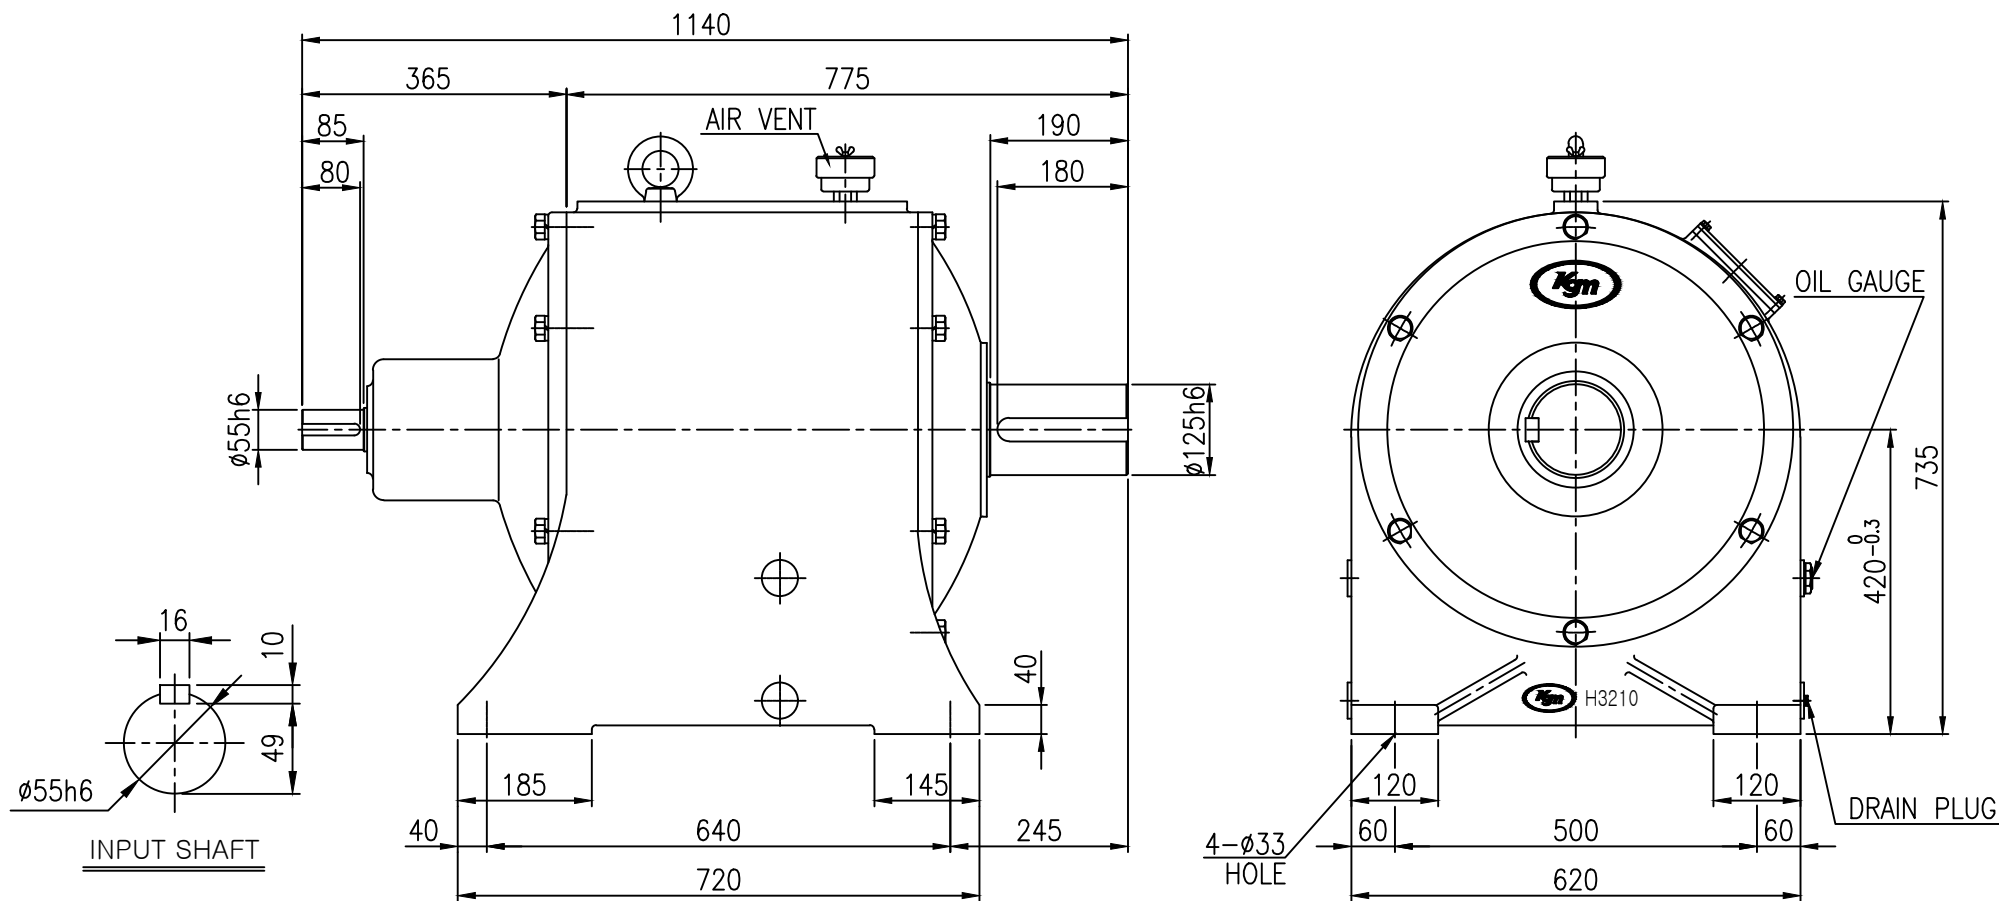

KD-HL H4203	CAPACITY(Kw)	30kw4P			22kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	660					

TOOTH CHAMFERING		M O D U L E					표기와 일반 공차				
		5	5-15	15			각도 : ±0.2°	6 - 30 : ±0.1			
HQ. T	C1	0.2	0.5	1.0			CHAMFER: C1.0	30 - 120: ±0.15			
	C2	1.0	1.5	2.0			FILLET: R1.0	120 - 315 : ±0.2			
HC & HQ. I	C1	0.5	1.0	2.0			M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0							

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KD-HL LINE POWER 30KW 4P I=1/40~1/60 OUTLINE DIMENSION		CUSTOMER KD-HL H4203 STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN		DATE	2018.09.10	PROJECTION			
CHECKED		REF. No.	KD-HL H4203	REV.	No.		
APPROVED		DRAWING No.	KDHL-H4203-40-40-00-0D				
(주) 케이 지 엠 KOREA GEARED MOTOR							

M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3