
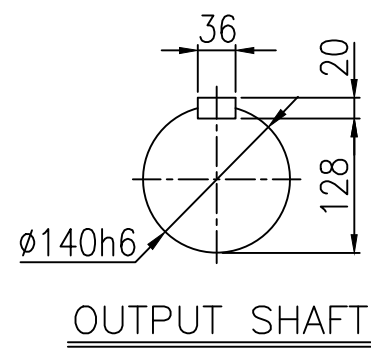
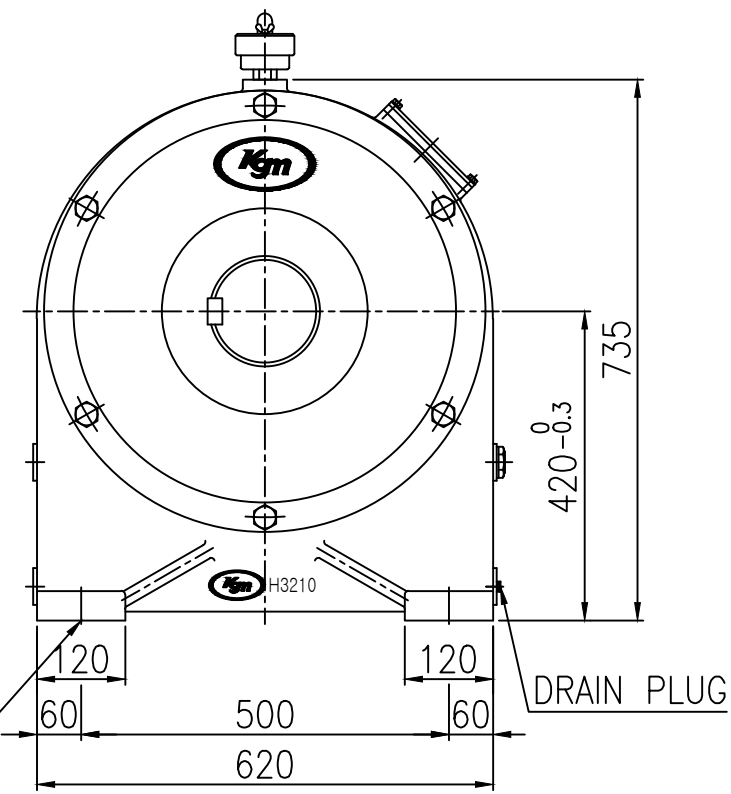


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

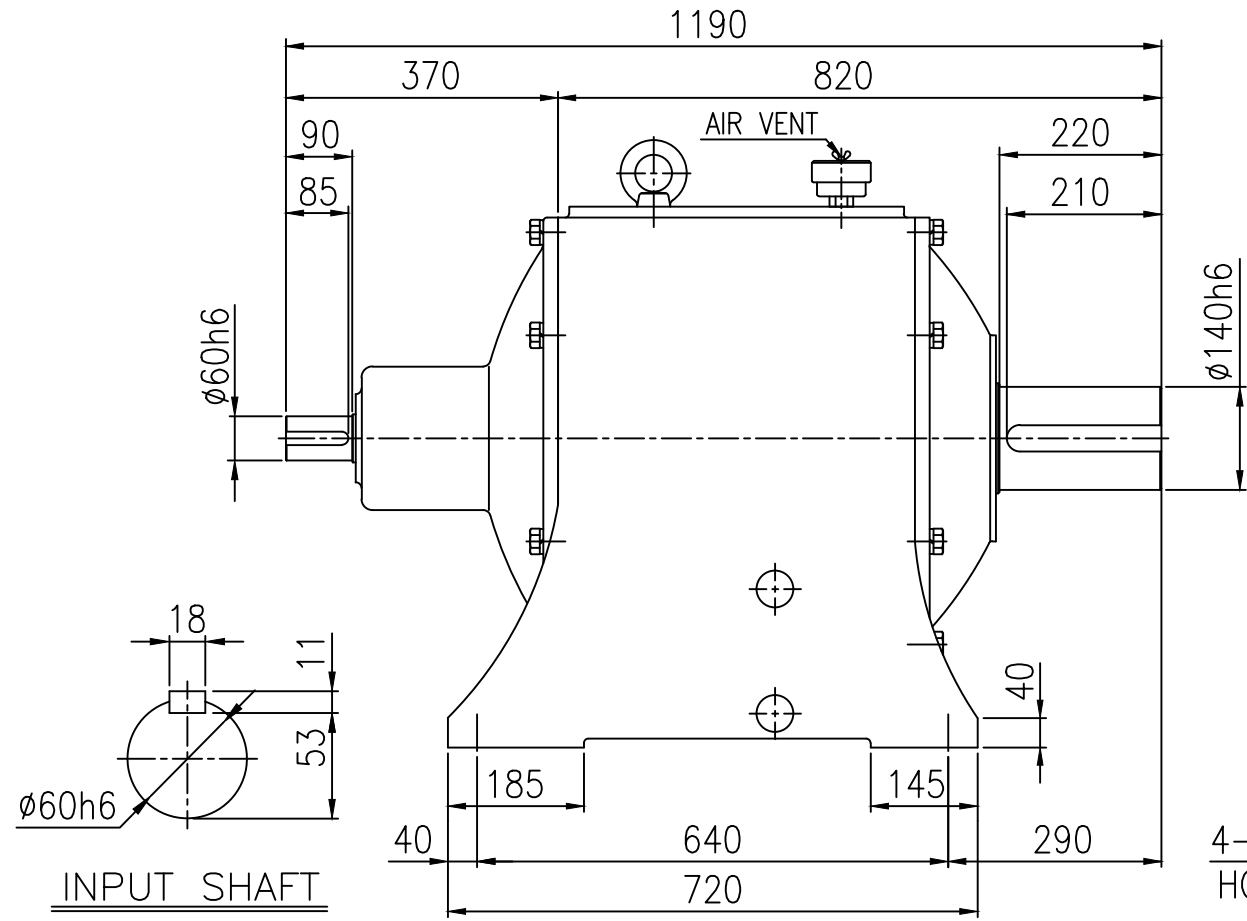

KD-HL H4203	CAPACITY	37kw4P			30kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	680					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 ~ 1000 : ±0.
	C2	2.0	3.0	5.0				M<8(R0.1~1M)	M=8~15(R0.3M)