
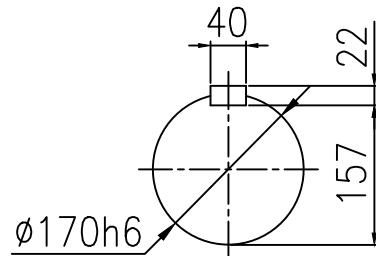
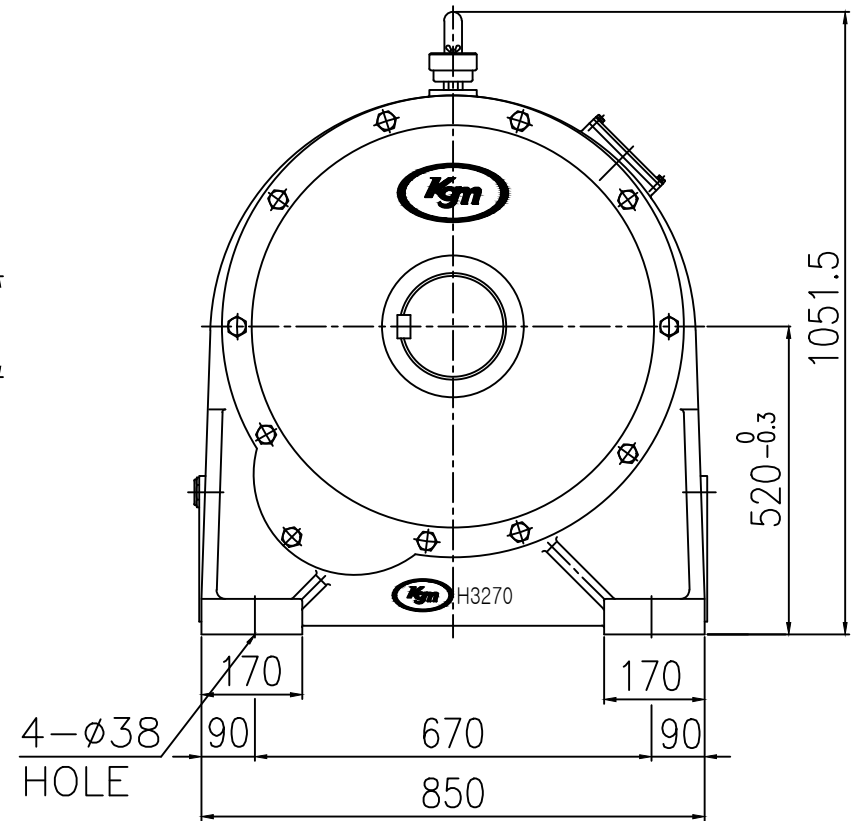


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

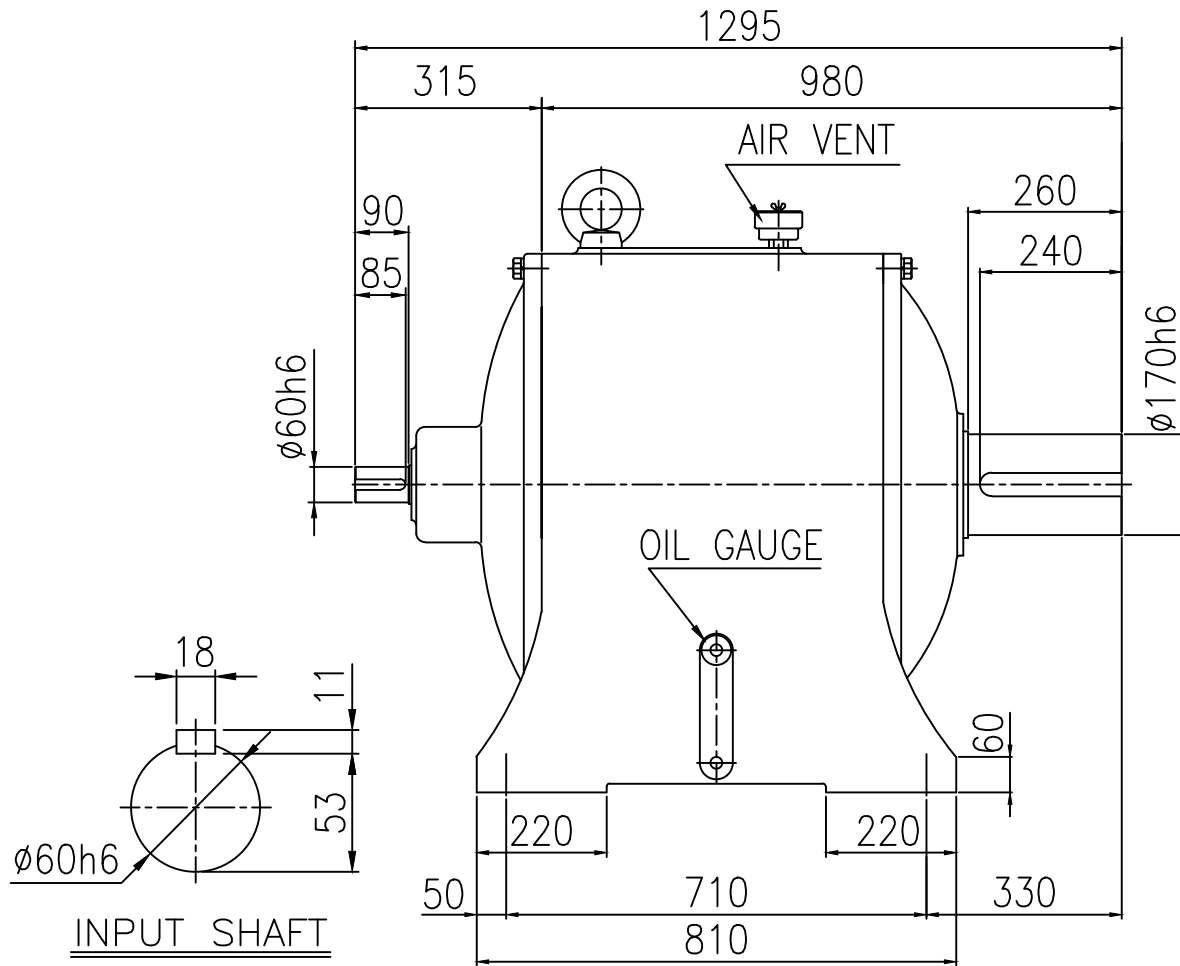

OUTPUT SHAFT

KD-HL H5203	CAPACITY	55kw4P				37kw6P			
	REDUCTION RATIO	1/30	1/40	1/50	1/60	1/30	1/40	1/50	1/60
	OUTPUT R.P.M	60	45	36	30	40	30	24	20
	WEIGHT (Kg)	1000							

TOOTH CHAMFERING		M O D U L E			표기외 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본 세에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포거나, 무단하게 누설할 수 없습니다.
		5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120: ±0.15
HC & HQ. I	C1	0.5	1.0	2.0	FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ▽	315 - 1000 : ±0.3
					1000 이상 : ±0.5	

OUT LINE DWG									
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KD-HL LINE POWER 55KW 4P I=1/30~1/60			CUSTOMER KD-HL H5203				
		OUTLINE DIMENSION			STANDARD TYPE				
DRAWN	KSS		SCALE		1 / 1		UNIT	mm	
DESIGN			DATE		2018.09.10		PROJECTION		
CHECKED			REF. No.		KD-HL H5203			REV. No.	
APPROVED			DRAWING No.		KDHL-H5203-75-30-60-0D				
 (주) 케이 지 엠 KOREA GEARED MOTOR									

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3