
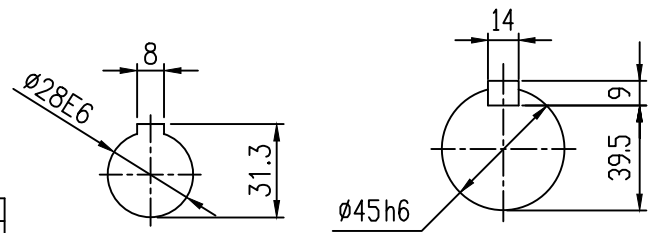


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

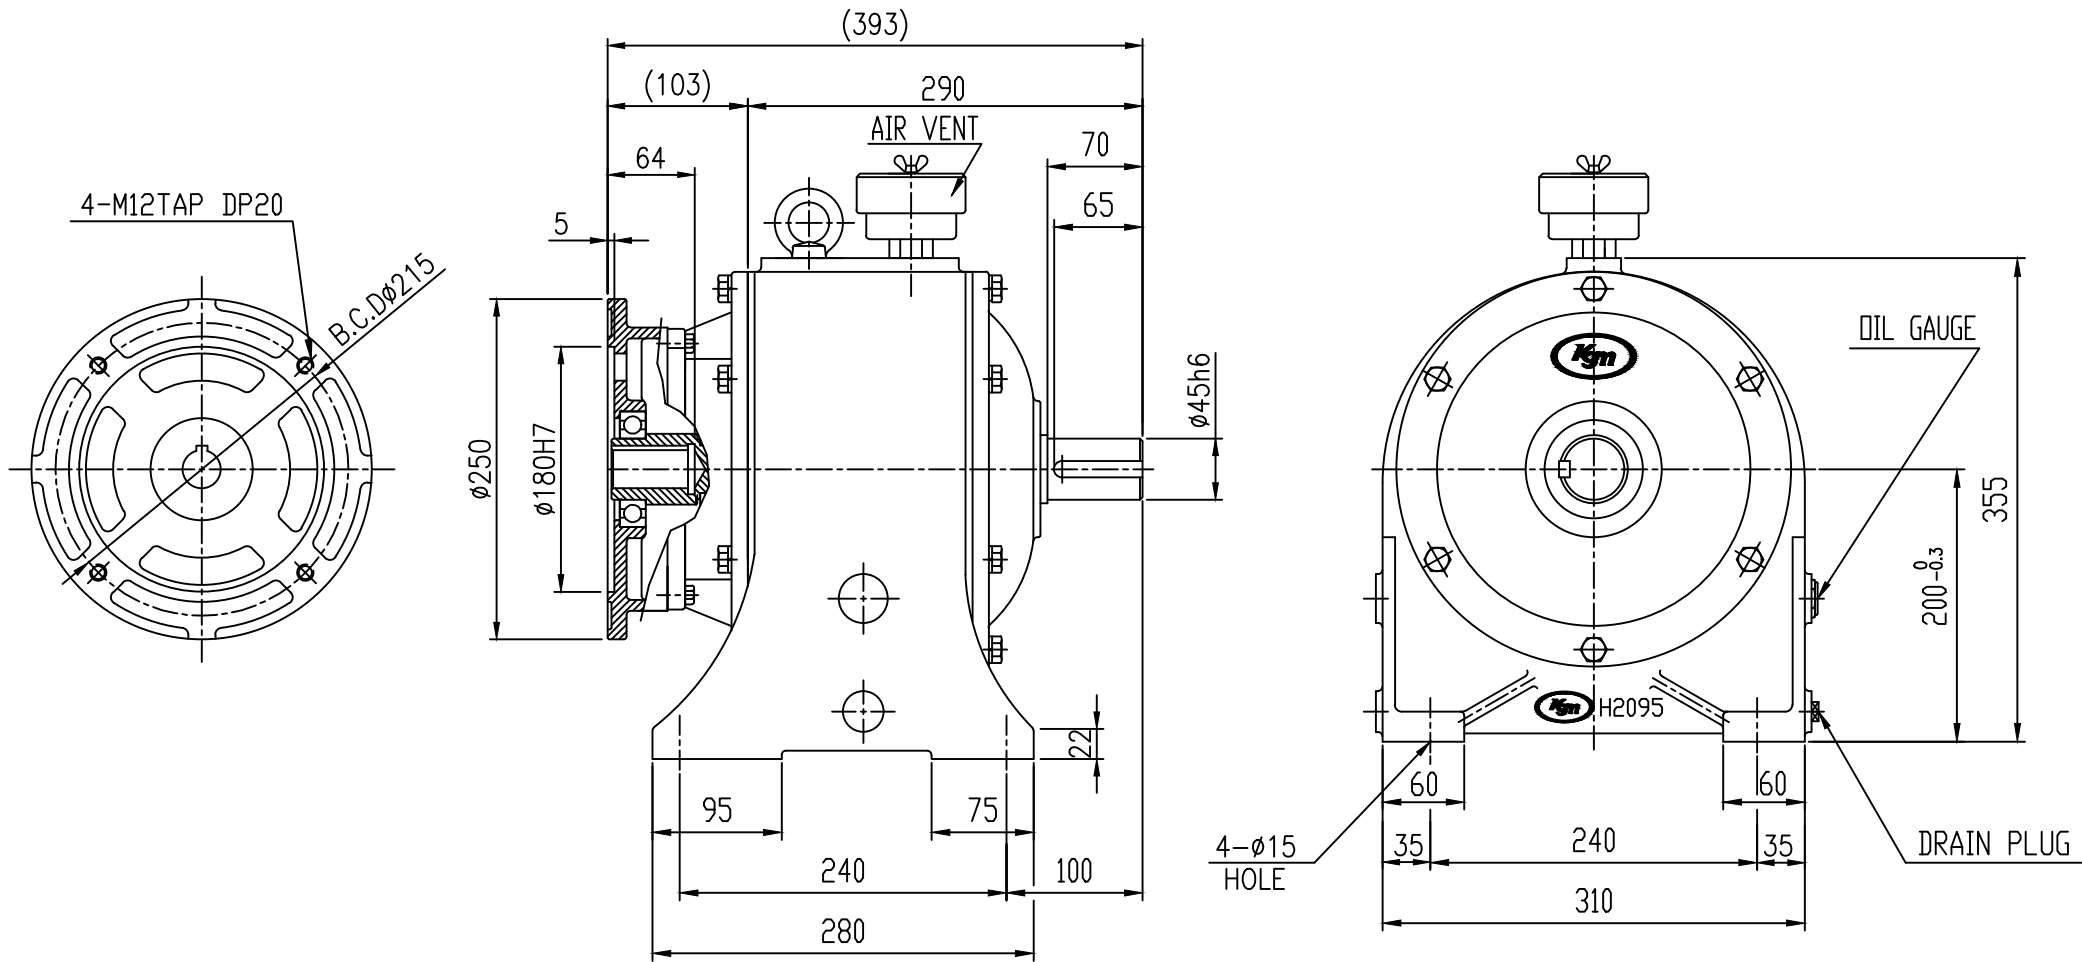

INPUT KEY

OUTPUT SHAFT

KD H2002 I.E.C	CAPACITY(Kw)	3.7kw4P			2.2kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	90					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0	 <td rowspan="2"><td rowspan="2"><th>CHAMFER: C1.0</th><td>30 - 120 : ±0.1</td></td></td>	 <td rowspan="2"><th>CHAMFER: C1.0</th><td>30 - 120 : ±0.1</td></td>	 <th>CHAMFER: C1.0</th> <td>30 - 120 : ±0.1</td>	CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0 <th>FILLET: R1.0</th> <td>120 - 315 : ±0.2</td>				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0 <td rowspan="2"><td rowspan="2"><td rowspan="2"><th>마무리: ▽</th><td>315 - 1000 : ±0.3</td></td></td></td>	 <td rowspan="2"><td rowspan="2"><th>마무리: ▽</th><td>315 - 1000 : ±0.3</td></td></td>	 <td rowspan="2"><th>마무리: ▽</th><td>315 - 1000 : ±0.3</td></td>	 <th>마무리: ▽</th> <td>315 - 1000 : ±0.3</td>	마무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)