




NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

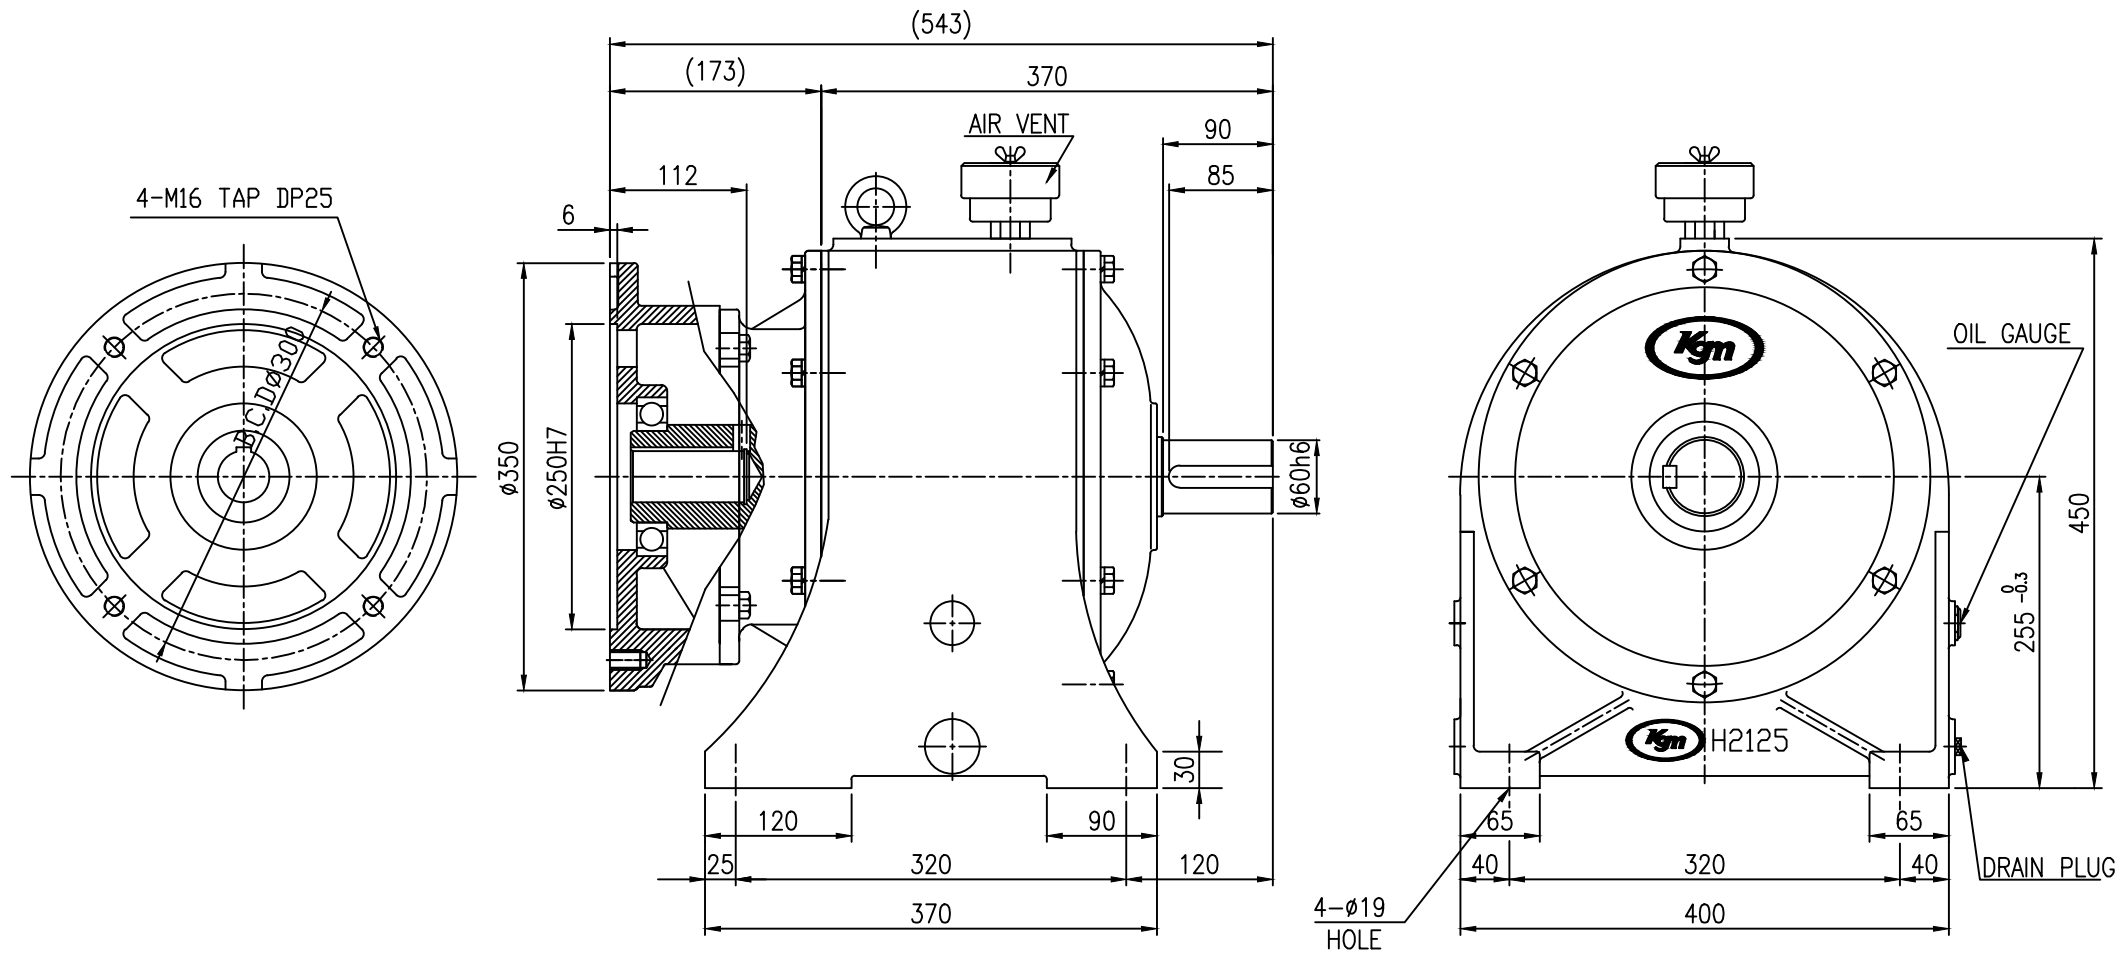

KD H2552 I.E.C	CAPACITY(Kw)	11kw4P			7.5kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	150					

TOOTH CHAMFERING		MODULE			표기 및 일반 공차	본 도면은 (주)케이지엠의 기술 재산입니다. 본 도면은 지적 재산권 관련 법규에 의하여 보호되며, (주)케이지엠으로 부터 본서에 의한 승인 없이는 본 도면의 전부 또는 일부를 복사 또는 배포하거나, 무단하게 누설할 수 없습니다.
		5	5-15	15		
HQ. T	C1	0.2	0.5	1.0	각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0	CHAMFER: C1.0	30 - 120 : ±0.15
HC & HQ. I	C1	0.5	1.0	2.0	FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0	마무리: ▽	315 - 1000 : ±0.3
					1000 이상 : ±0.5	

() 내의 치수는 다소 변경될수 있음.

	OUT LINE DWG					
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR IEC 11KW 4P I=1/10~1/20		CUSTOMER	KD H2552		
	OUTLINE DIMENSION					
DRAWN	KSS	SCALE	1 / 1	UNIT	MM	
DESIGN	YHH	DATE	2019.02.21	PROJECTION	1 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	
CHECKED		REF. No.	KD H2552		REV	No.
APPROVED		DRAWING No.	KDH2552-IBC-15-10-20-0D			

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3



(주) 케이 지 엠
KOREA GEARED MOTOR