




NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

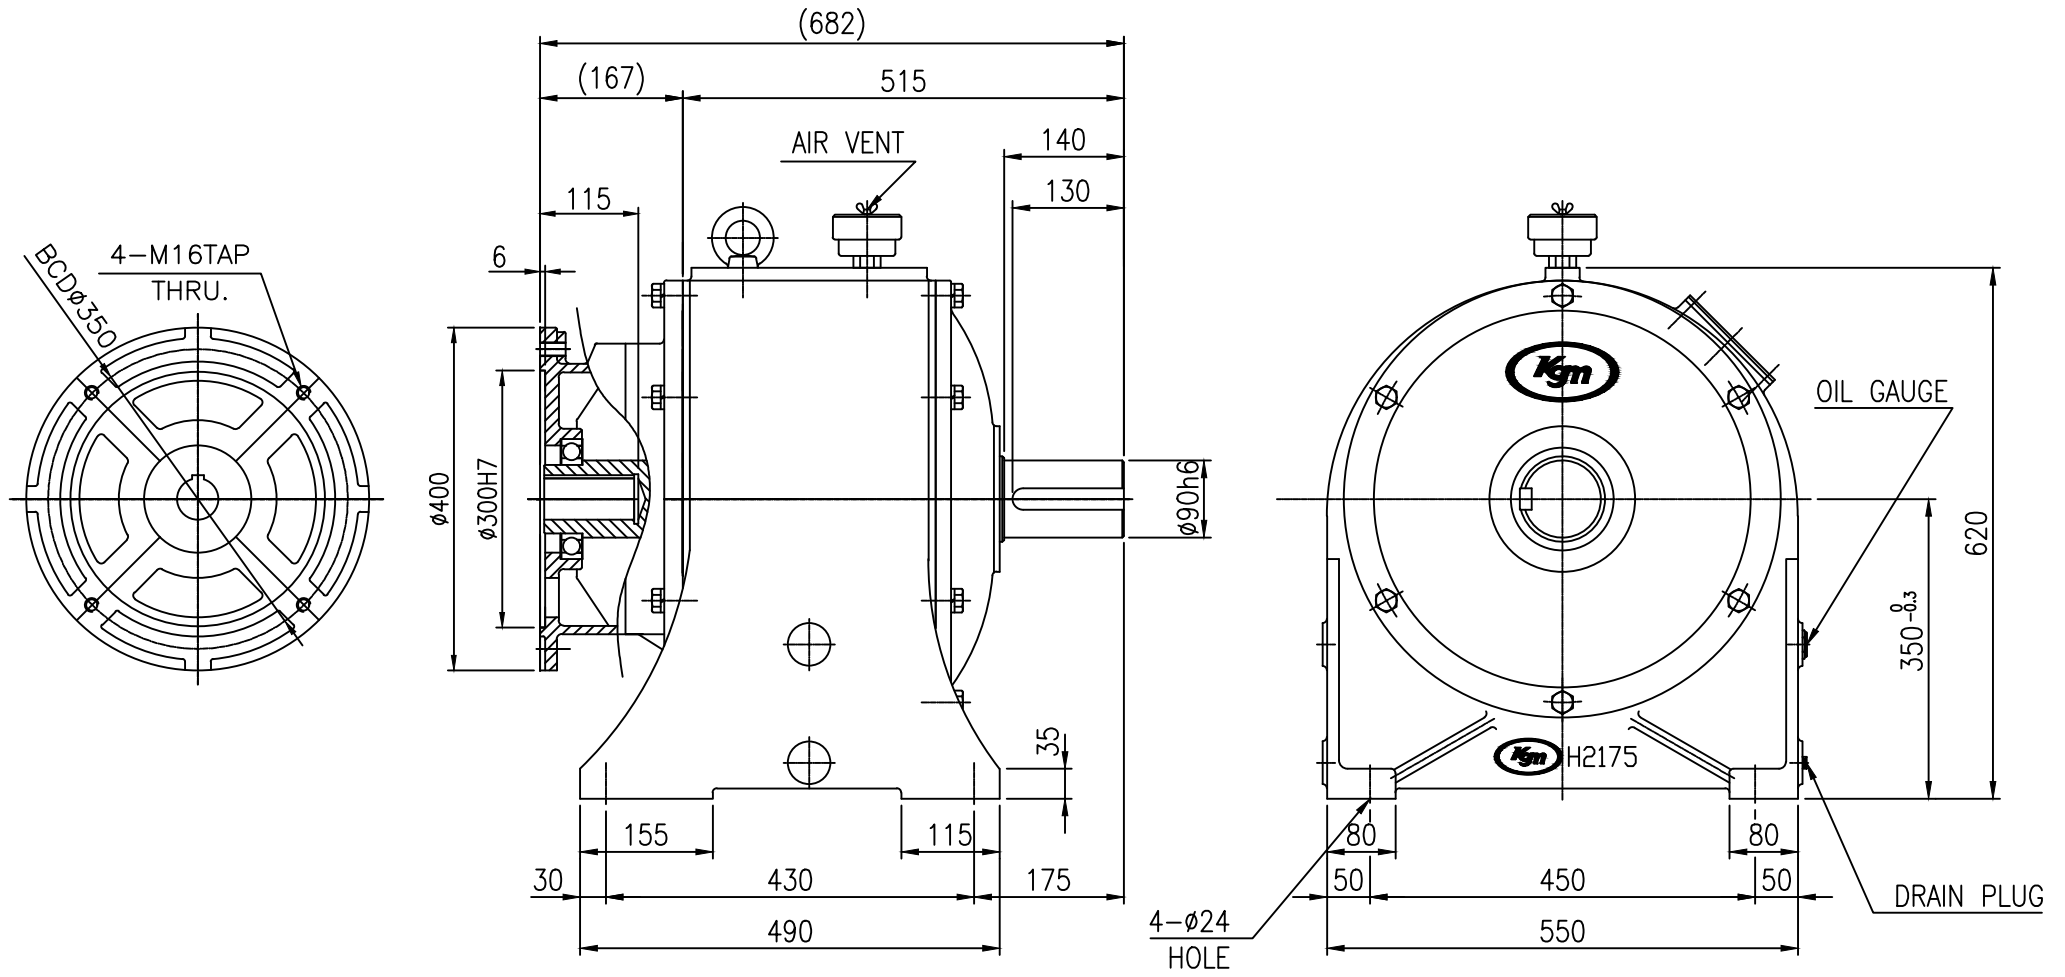

M5*0.8
M6*1
M8*1.25
M10*1.5
M12*1.75
M16*2
M18*2.5
M20*2.5
M22*2.5
M24*3



INPUT KEY



OUTPUT SHAFT

KD H3502 I.E.C	CAPACITY(Kw)	22kw4P		15kw6P	
	REDUCTION RATIO	1/25	1/30	1/25	1/30
	OUTPUT R.P.M	72	60	48	40
	WEIGHT (Kg)	370			

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 - 1000 : ±0.
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)