



M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

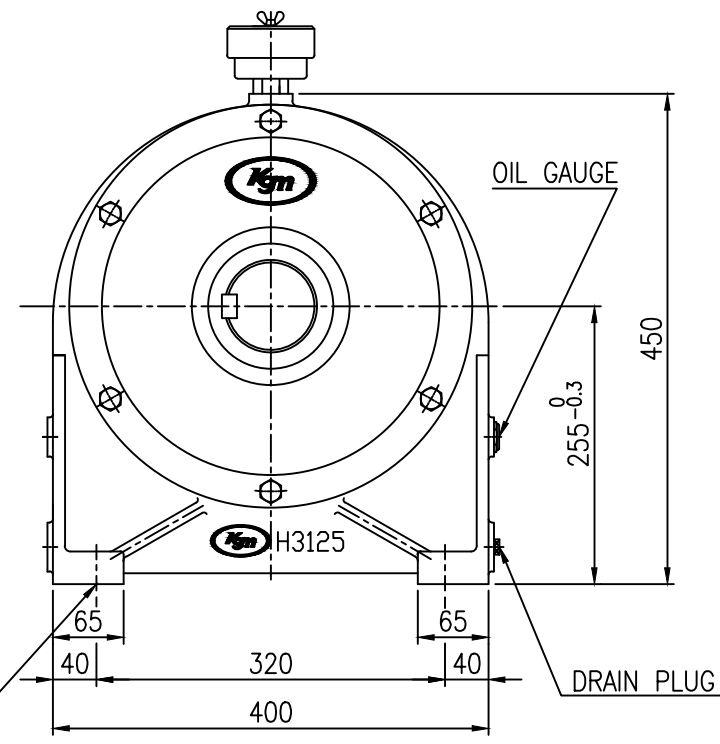

KD H2553 I.E.C	CAPACITY(Kw)	7.5kw4P			5.5kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	255					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0					마무리 : 315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0					M<B(R0.1-1M)

()내의 치수는 다소 변경될수 있음.

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR IEC 7.5KW 4P I=1/40~1/80			CUSTOMER KD H2553			
	OUTLINE DIMENSION			I.E.C TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT		MM	
DESIGN	YHH	DATE	2019.07.18	PROJECTION			
CHECKED		REF. No.	KD H2553			REV. No.	△
APPROVED		DRAWING No.	KDH2553-IEC-10-40-40-00				



(주) 케이지엠
KOREA GEARED MOTOR