



M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3



KD H3003 I.E.C	CAPACITY(Kw)	15kw4P			11kw6P		
	REDUCTION RATIO	1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M	45	36	30	30	24	20
	WEIGHT (Kg)	380					

TOOTH CHAMFERING		M O D U L E						표기 및 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120: ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2, ±0.3
HC & HQ. I	C1	0.5	1.0	2.0				대무리:	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				M<8(R0.1-1M)	M=8-15(R0.3M)

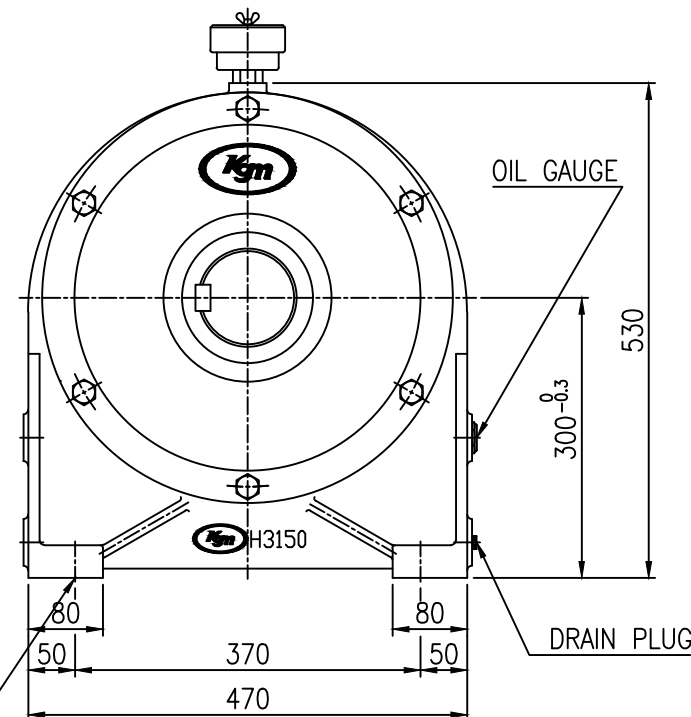

()내의 치수는 다소 변경될수 있음.

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	KDH GEARED MOTOR IEC 15KW 4P I=1/40~1/80			CUSTOMER	KD H3003		
	OUTLINE DIMENSION			I.E.C TYPE			
	DRAWN	KSS	SCALE	1 / 1	UNIT	MM	
DESIGN	YHH	DATE	2019.11.04	PROJECTION			
CHECKED	REF. No.		KD H3003			REV	
APPROVED	DRAWING No.		KDH3003-IEC-20-40-60-OD		No.		



(주) 케이 지 엠
KOREA GEARED MOTOR