

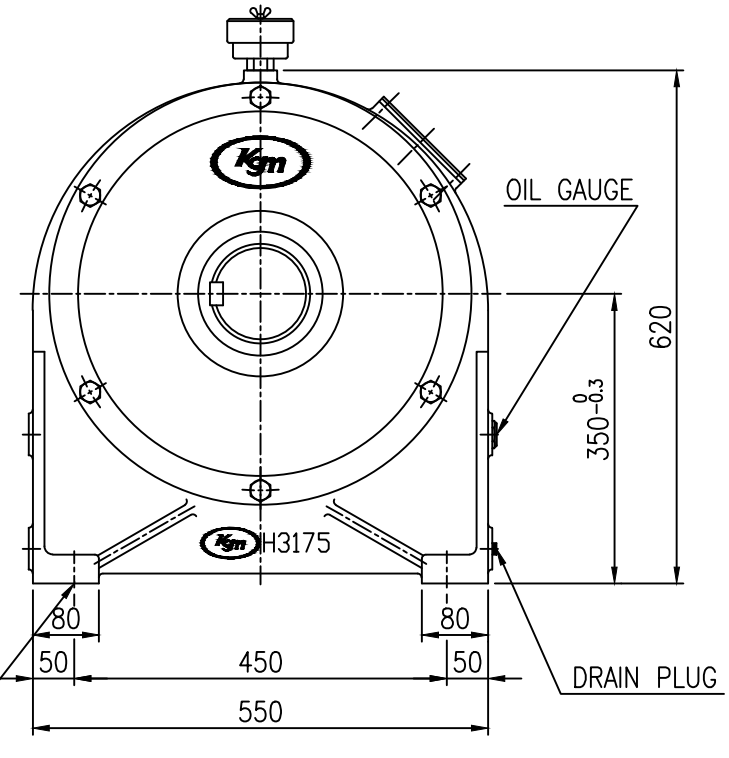
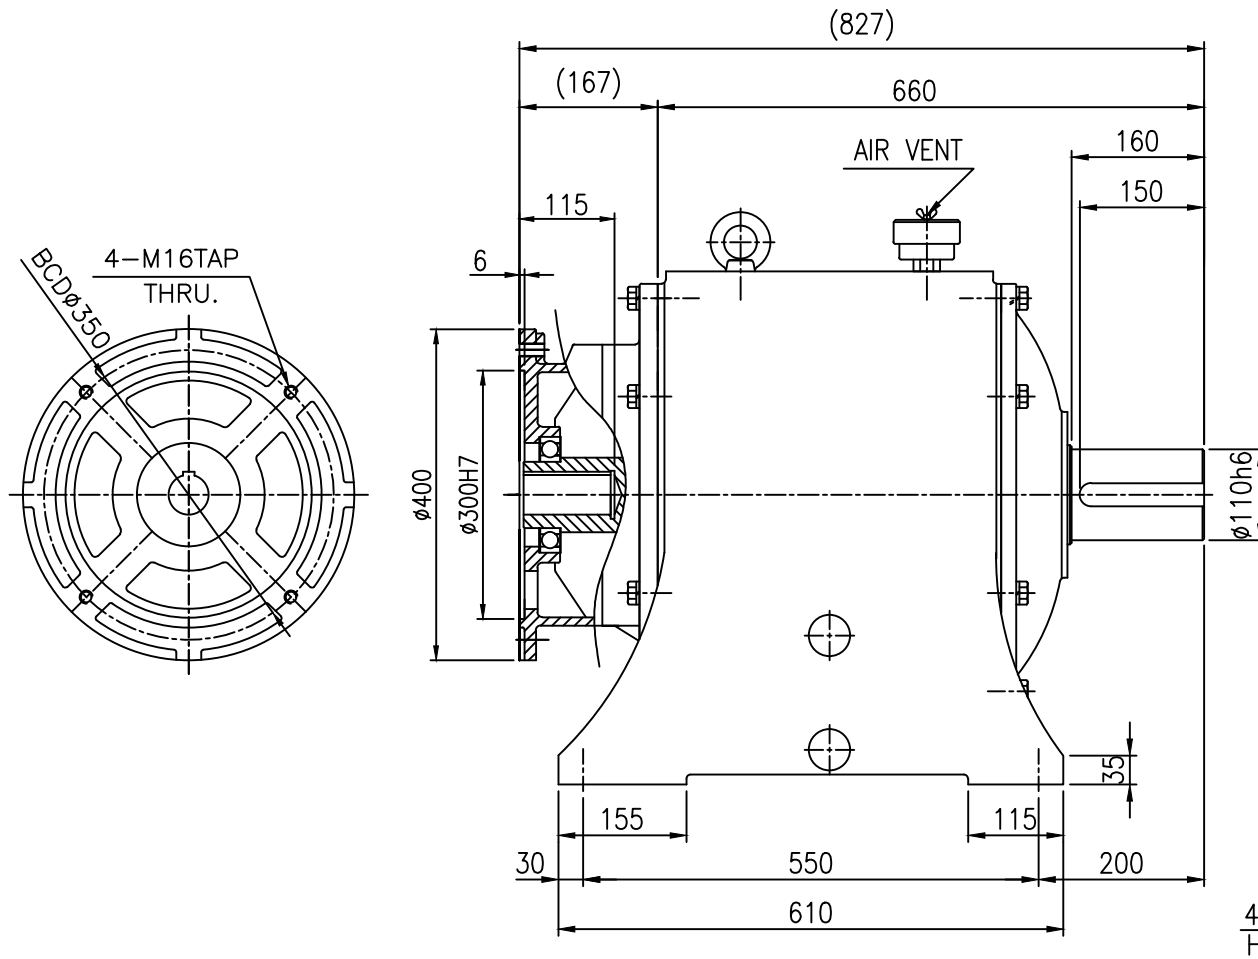


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					



()내의 치수는 다소 변경될수 있음.

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3



KD H3503 I.E.C	CAPACITY(Kw)		22kw4P			15kw6P		
	REDUCTION RATIO		1/40	1/50	1/60	1/40	1/50	1/60
	OUTPUT R.P.M		45	36	30	30	24	20
	WEIGHT (Kg)		570					

TOOTH CHAMFERING		MODULE			표기	표기	표기	표기	표기
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0	표기	표기	표기	표기	표기
	C2	1.0	1.5	2.0					
HC & HQ. I	C1	0.5	1.0	2.0	표기	표기	표기	표기	표기
	C2	2.0	3.0	5.0					

OUT LINE DWG		SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
No.	DESCRIPTION	SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
TITLE SPEC.		KDH GEARED MOTOR IEC 22KW 4P I=1/40~1/60 OUTLINE DIMENSION		CUSTOMER		KD H3503 I.E.C TYPE		1 / 1		UNIT	
DRAWN		KSS		SCALE		1 / 1		UNIT		mm	
DESIGN		YHH		DATE		2018.02.12		PROJECTION		1st	
CHECKED				REF. No.		KD H3503		REV		No.	
APPROVED				DRAWING No.		KDH3503-IEC-30-40-60-0D					



(주) 케이 지 엠
KOREA GEARED MOTOR