



M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

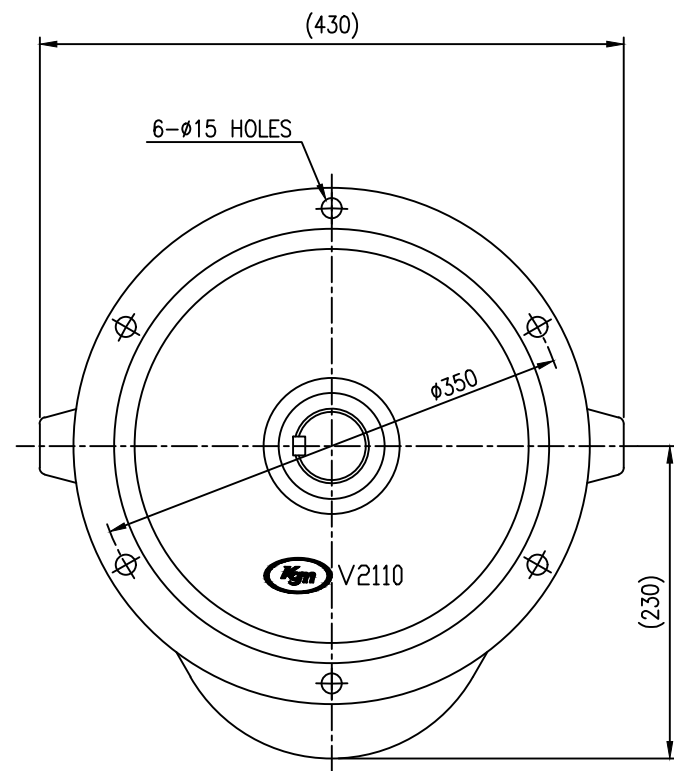

KD V2252 I.E.C	CAPACITY(Kw)	5.5kw4P		3.7kw6P	
	REDUCTION RATIO	1/10	1/20	1/10	1/20
	OUTPUT R.P.M	180	90	120	60
	WEIGHT (Kg)	120			

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5~15	15				각도 : $\pm 0.2^{\circ}$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0				마우리 : ∇	315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0				M<B(R0.1-1M)	M=8-15(R0.3M)

()내의 치수는 다소 변경될수 있음.

		OUT LINE DWG								
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK				
TITLE SPEC.	KDV GEARED MOTOR IEC 5.5KW 4P I=1/10~1/20 OUTLINE DIMENSION	CUSTOMER	KD V2252 I.E.C TYPE							
DRAWN	KSS	SCALE	1 / 1	UNIT	MM					
DESIGN	YHH	DATE	2020.07.14	PROJECTION						
CHECKED		REF. No.	KD V2252	REV.						
ARRORVED		DRAWING NO.	KDYV2252-IBC-7.5-10-20-OD	Rev. No.						



(주) 케이지엠
KOREA GEARED MOTOR