

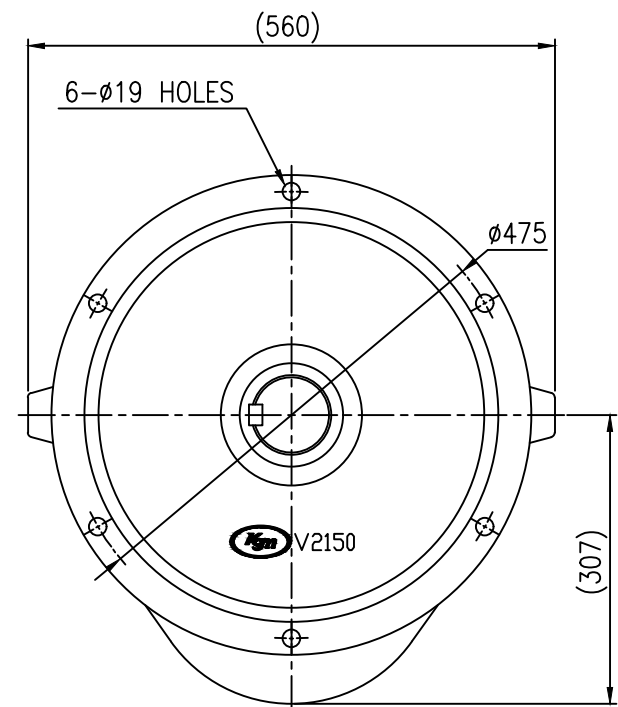


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

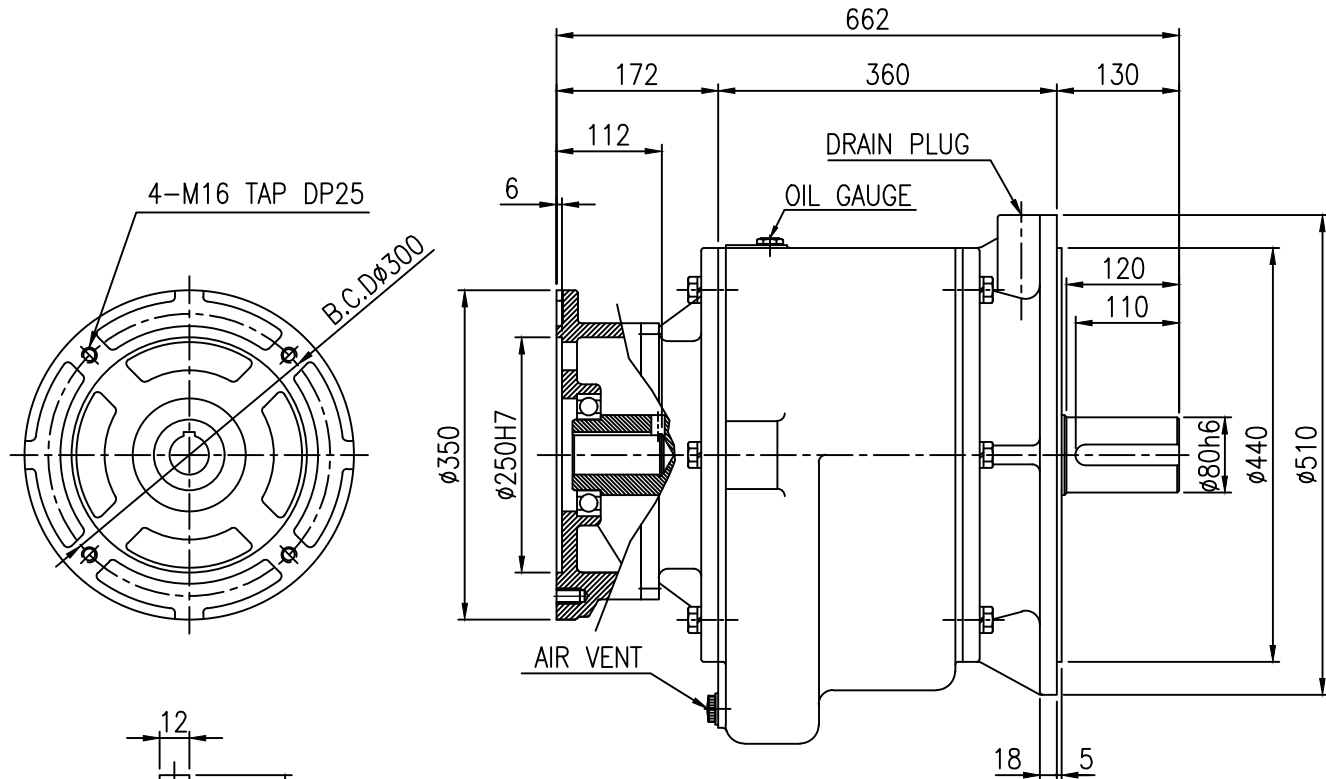

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3

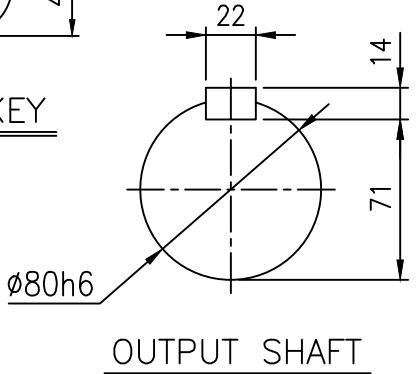

KD V3002 I.E.C	CAPACITY(Kw)	15kw4P			11kw6P		
	REDUCTION RATIO	1/10	1/20	1/30	1/10	1/20	1/30
	OUTPUT R.P.M	180	90	60	120	60	40
	WEIGHT (Kg)	330					

TOOTH CHAMFERING		MODULE						표기와 일반 공차	
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0				각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0				CHAMFER: C1.0	30 - 120 : ±0.15
HC & HQ. I	C1	0.5	1.0	2.0				FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0				마무리: ▽	315 - 1000 : ±0.3
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1000 이상 : ±0.5	

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER				
	IEC 15KW 4P I=1/10~1/30		KD V3002				
	OUTLINE DIMENSION		I.E.C TYPE				
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.17	PROJECTION	1st Angle		
CHECKED		REF. No.	KD V3002			REV	△
APPROVED		DRAWING No.	KDV3002-IEC-20-10~30-00			No.	