

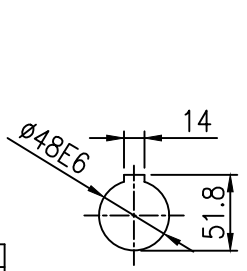
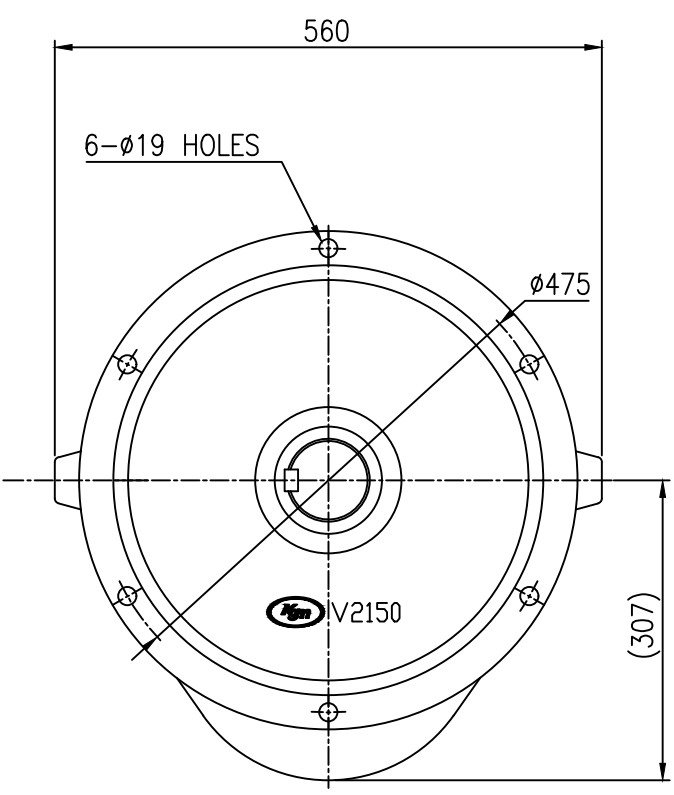
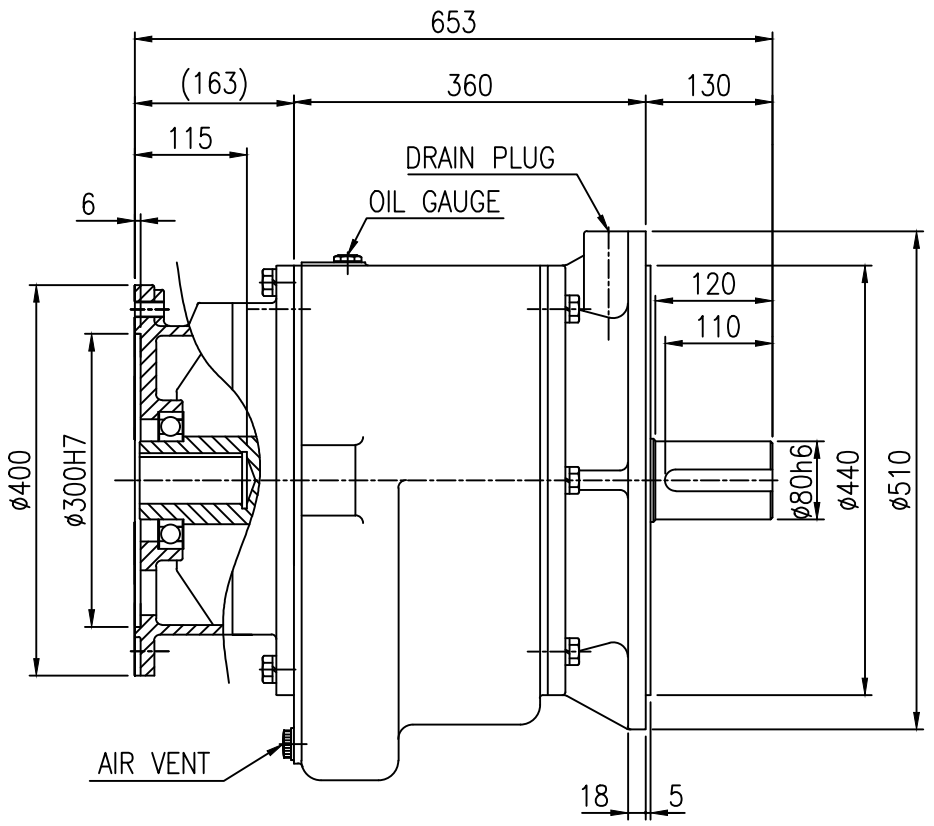


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

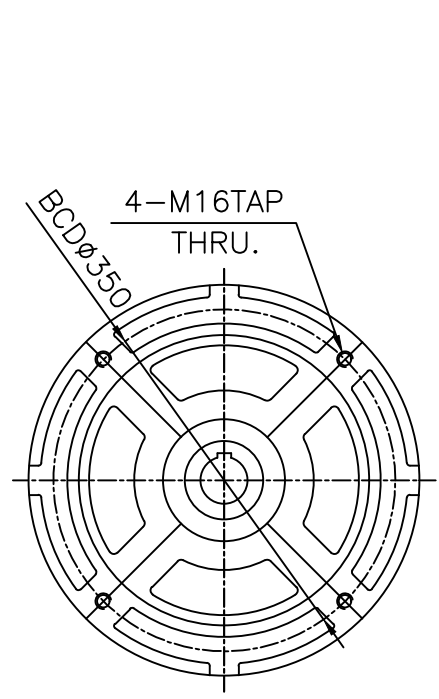

INPUT KEY

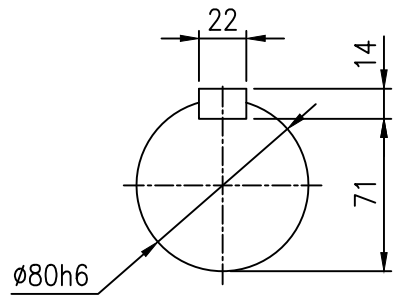

OUTPUT SHAFT

KD V3002 I. E. C	CAPACITY(Kw)	22kw4P
	REDUCTION RATIO	1/15
	OUTPUT R.P.M	120
	WEIGHT (Kg)	350

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				머무리: ▽	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0					1000 이상 : ±0.5
M<8(R0.1-1M)					M=8-15(R0.3M)	M>15(R0.3M)			

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	KDV GEARED MOTOR		CUSTOMER KD V3002				
	22KW 4P RATIO=1/15		I.E.C TYPE				
	OUTLINE DIMENSION						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN		DATE	2019.11.08	PROJECTION	1st		
CHECKED		REF. No.	KD V3002				
APPROVED		DRAWING No.	KDV3002-IBC-30-15-0D				



(주) 케이 지 엠
KOREA GEARED MOTOR