


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3




Technical drawing of a 1000L oil drum showing dimensions and components. The drawing includes a side view and a cross-section view.

Dimensions:

- Overall length: 722 (bracketed)
- Length from front face to drain plug: 167 (bracketed)
- Length from front face to oil gauge: 405 (bracketed)
- Length from front face to rear face: 150 (bracketed)
- Distance from front face to drain plug: 115 (bracketed)
- Distance from front face to oil gauge: 140 (bracketed)
- Distance from front face to rear face: 130 (bracketed)
- Distance from front face to rear face: 510 (bracketed)
- Distance from front face to rear face: 590 (bracketed)
- Distance from front face to rear face: 400 (bracketed)
- Distance from front face to rear face: 300H7 (bracketed)
- Distance from front face to rear face: 25 (bracketed)
- Distance from front face to rear face: 5 (bracketed)

Labels:

- DRAIN PLUG
- OIL GAUGE
- AIR VENT

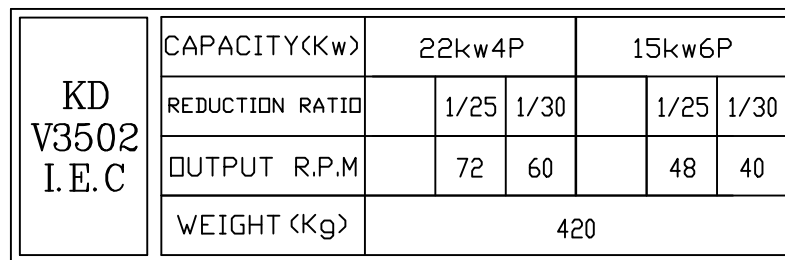

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : $\pm 0.2^{\circ}$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리 : ▽	315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0				M<B(R0.1-1M)	M=8-15(R0.3M)

		OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK			
TITLE SPEC.	KDV GEARED MOTOR IEC 22KW 4P I=1/25~1/30		CUSTOMER KD V3502 I.E.C TYPE						
	OUTLINE DIMENSION								
DRAWN	KSS	SCALE	1 / 1	UNIT		MM			
DESIGN		DATE	2019.08.12	PROJECTION					
CHECKED		REF. No.	KD V3502			REV			
APPROVED		DRAWING No.	KD V3502-IEC-30-25-30-0D						



(주) 케이지엠
KOREA GEARED MOTOR