
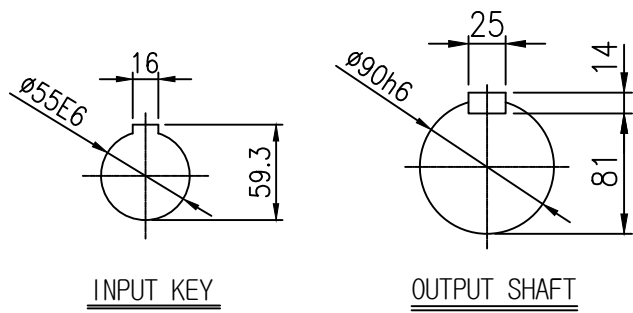


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

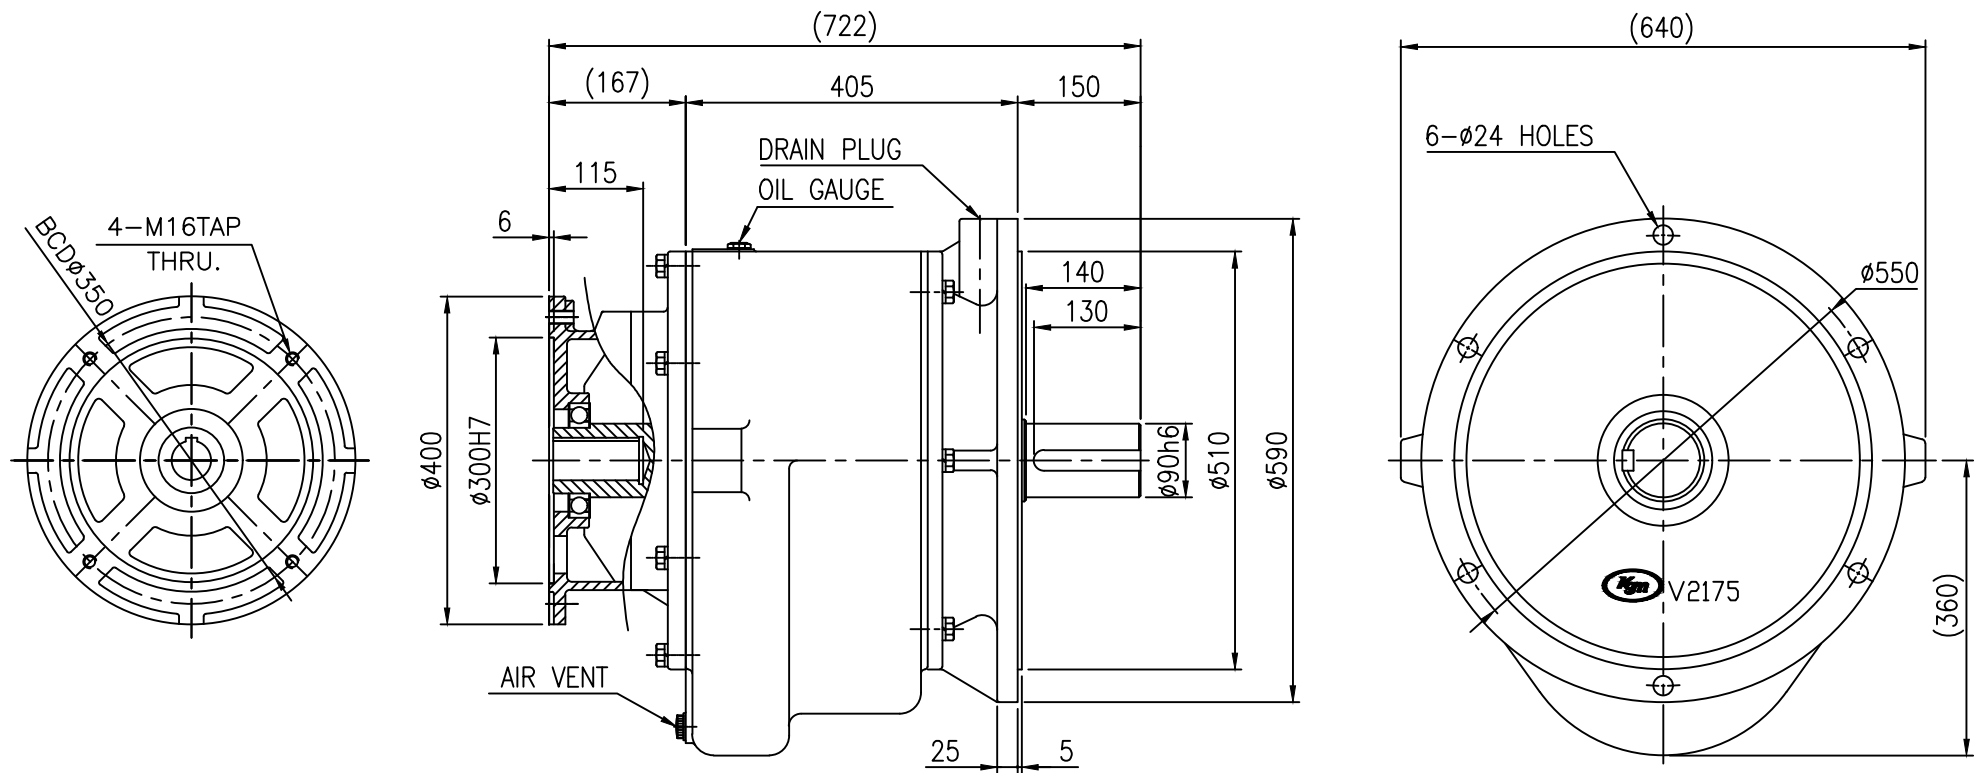

KD V3502 I.E.C	CAPACITY(Kw)	30kw4P			19,22kw6P		
	REDUCTION RATIO	1/10	1/15	1/20	1/10	1/15	1/20
	OUTPUT R.P.M	180	120	90	120	80	60
	WEIGHT (Kg)	420					

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.1
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.1
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽	315 - 1000 : ± 0.1
	C2	2.0	3.0	5.0				1000 이상 : ± 0.1	
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)		

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG		SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
No.	DESCRIPTION	SPECIFICATION		MAT'L		Q'TY		W/T		REMARK	
TITLE SPEC.		KDV GEARED MOTOR IEC 30KW 4P I=1/10~1/20 OUTLINE DIMENSION		CUSTOMER		KD V3502 I.E.C TYPE					
DRAWN	KSS	SCALE		1 / 1		UNIT		mm			
DESIGN	YHH	DATE		2020.07.02		PROJECTION		1st			
CHECKED		REF. No.		KD V3502		REV. No.					
APPROVED		DRAWING No.		KDV3502-IEC-40-10-20-00							

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3



(주) 케이 지 엠
KOREA GEARED MOTOR