



M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

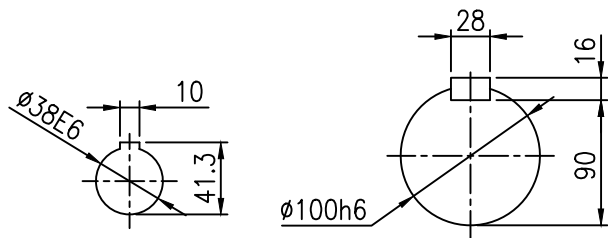

OUTPUT SHAFT

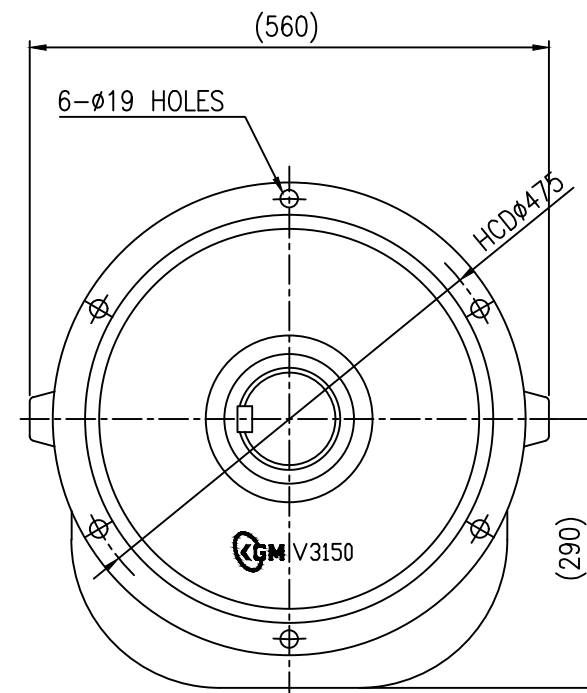

KD V3003 I.E.C	CAPACITY(Kw)	5.5kw4P
	REDUCTION RATIO	1/120
	OUTPUT R.P.M	15
	WEIGHT (Kg)	390

TOOTH CHAMFERING		M O D U L E						표기 및 일반 공차	
		5	5-15	15				각도 : $\pm 0.2^\circ$	6 - 30 : ± 0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 - 120 : ± 0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 - 315 : ± 0.2
HC & HQ. I	C1	0.5	1.0	2.0					마무리 : ∇ 315 - 1000 : ± 0.3
	C2	2.0	3.0	5.0					

본 도연은 (주)케이지엠의 기술 자산입니다. 본 도연의 지적 재산권 관련 법규에 의하여 보호되며,
(주)케이지엠으로 부터 서에 의한 승인 없이는 본 도연의 전부 또는 일부를 복제 또는 배가거나, 타인에게 제공할 수 없습니다.

()내의 치수는 다소 변경될수 있음.

[illegible]

(주) 케이 지 엠
KOREA GEARED MOTOR