
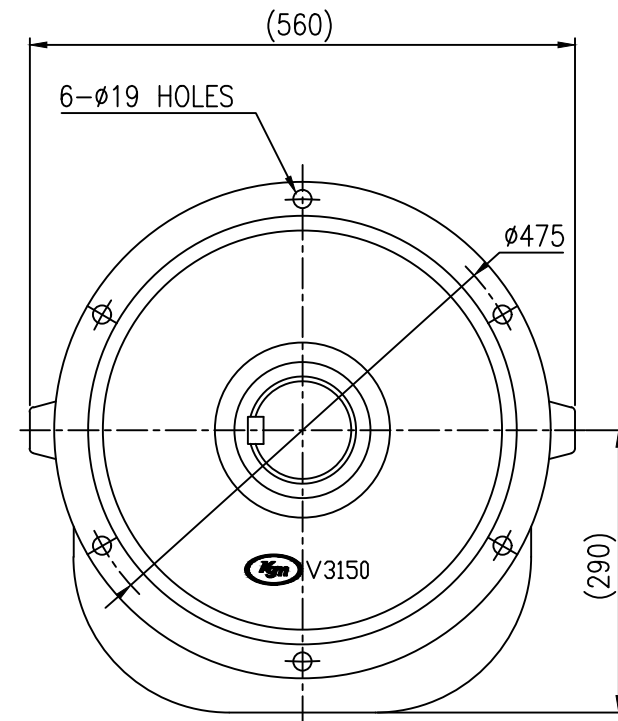


NO.	REVISION	DATE	DESIGNED	CHECKED	APPROVED
△					
△					

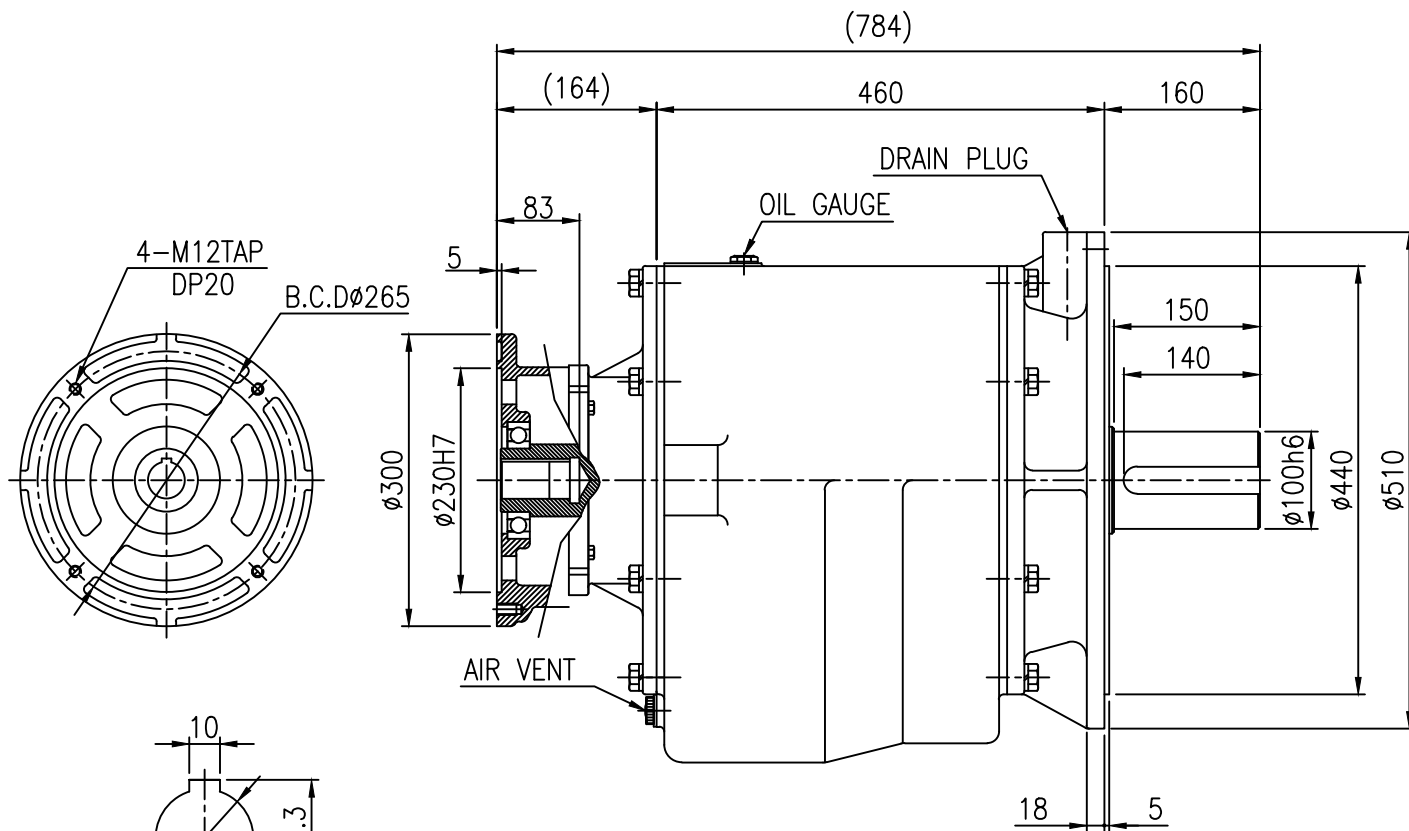

INPUT KEY

OUTPUT SHAFT

KD V3003 I.E.C	CAPACITY(Kw)	7.5kw4P			5.5kw6P		
	REDUCTION RATIO	1/90	1/100	1/120	1/90	1/100	1/120
	OUTPUT R.P.M	20	18	15	13.3	12	10
	WEIGHT (Kg)	420					

TOOTH CHAMFERING		MODULE						표기와 일반 공차	
		5	5-15	15					
HQ. T	C1	0.2	0.5	1.0				각도 : ±0.2°	6 - 30 : ±0.1
	C2	1.0	1.5	2.0				CHAMFER: C1.0	30 - 120 : ±0.15
HC & HQ. I	C1	0.5	1.0	2.0				FILLET: R1.0	120 - 315 : ±0.2
	C2	2.0	3.0	5.0				마무리: ▽	315 - 1000 : ±0.3
					M<8(R0.1-1M)	M=8-15(R0.3M)	M>15(R0.3M)	1000 이상 : ±0.5	

()내의 치수는 다소 변경될수 있음.

OUT LINE DWG							
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.		KDV GEARED MOTOR IBC 7.5KW 4P I=1/90~1/120 OUTLINE DIMENSION		CUSTOMER KD V3003 I.E.C TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2020.12.03	PROJECTION	1st		
CHECKED		REF. No.	KD V3003	REV	No.		
APPROVED		DRAWING No.	KDV3003-IBC-10-90~120-0D				
		(주) 케이 지 엠 KOREA GEARED MOTOR					

M5±0.8
M6±1
M8±1.25
M10±1.5
M12±1.75
M16±2
M18±2.5
M20±2.5
M22±2.5
M24±3

