


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3



HOLLOW SHAFT

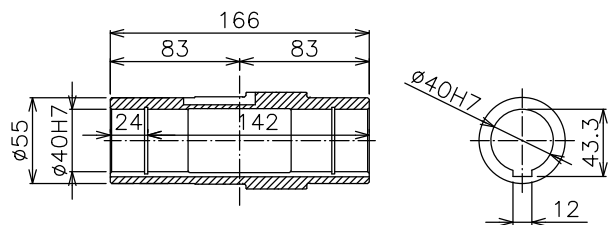

	OUT LINE DWG							
No.	DESCRIPTION		SPECIFICATION		MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	BEVEL HELICAL GEARED				CUSTOMER STANDARD TYPE			
	KB05 HSM							
	OUT LINE DWG							
DRAWN	KSS	SCALE	1 / 1		UNIT		mm	
DESIGN	YHH	DATE	2021.02.04		PROJECTION			
CHECKED	REF. No.							
APPROVED	DRAWING No.							
			KGM-KB06-HSM-00-00-0D					

TOOTH CHAMPERING		M O D U L E						표기와 일반 공차	
		5	5-15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 ~ 1000 : ±0.3
	C2	2.0	3.0	5.0				M<8(R0.1~1M)	M=8~15(R0.3M)

본 도면은 (주)케이지엘의
기술 자산입니다. 본 도면
은 지적 재산권 관련 법규
에 의하여 보호되며,
(주)케이지엘 으로부터
문서로 의한 승인 없이는
본 도면의 전부 또는 일부를
복사 또는 배포하거나,
타인에게 누설할 수 없습니다.



(주) 케이 지 엠
KOREA GEARED MOTOR