


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

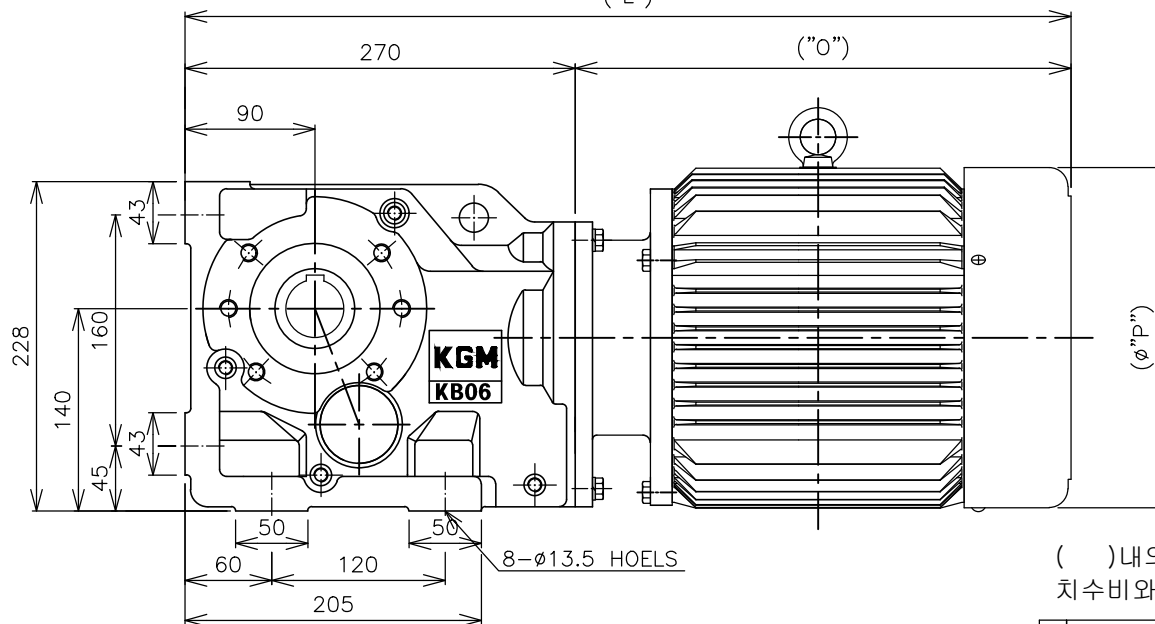

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5~15	15				각도 : ±0.2°	6 ~ 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1.0	30 ~ 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1.0	120 ~ 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: ▽ ▽	315 ~ 1000 : ±0.3
	C2	2.0	3.0	5.0				1000 이상 : ±0.5	
					M<8(R0.1~1M)	M=8~15(R0.3M)	M>15(R0.3M)		

본 도면은 (주)케이지엠 의
기술 자산입니다. 본 도면
은 지적 재산권 관련 법규
에 의하여 보호되며,
(주)케이지엠 으로 부터
문서에 의한 승인 없이는
본 도면의 전부 또는 일부
를 복사 또는 배제거나, 타
인에게 누설할 수 없습니

	OUT LINE DWG						
No.	DESCRIPTION		SPECIFICATION	MAT'L	Q'TY	W/T	REMARK
TITLE SPEC.	BEVEL HELICAL GEARED			CUSTOMER			
	KB06 HSM						
	OUT LINE DWG						
				STANDARD TYPE			
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2021.02.04	PROJECTION			
CHECKED	REF. No.		KGM-KB06-HSM-00-00-0D				
ARROVED	DRAWING No.						
			Rev. No. 				



(주) 케이 지 엠
KOREA GEARED MOTOR