


M5*0.8
M6* 1
M8*1.25
M10*1.5
M12*1.75
M16* 2
M18*2.5
M20*2.5
M22*2.5
M24*3

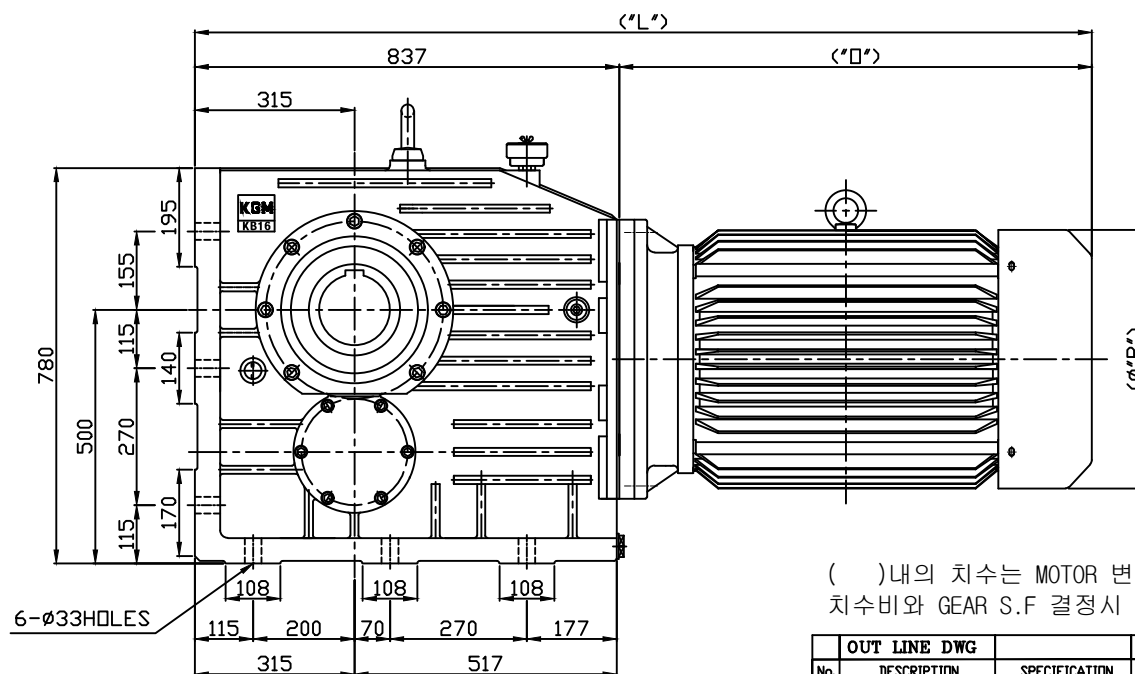

TOOTH CHAMFERING		M O D U L E						표기와 일반 공차	
		5	5~15	15				각도 : ±0.2°	6 - 30 : ±0.1
HQ. T	C1	0.2	0.5	1.0				CHAMFER: C1,0	30 - 120 : ±0.15
	C2	1.0	1.5	2.0				FILLET: R1,0	120 - 315 : ±0.2
HC & HQ. I	C1	0.5	1.0	2.0				마무리: 	315 - 1000 : ±0.3
	C2	2.0	3.0	5.0				M<B(R0.1-1M)	M=B-15(R0.3M)

()내의 치수는 MOTOR 변경에 따른
치수비와 GEAR S.F 결정시 치수 확정됨.

	OUT LINE DWG						
No.	DESCRIPTION	SPECIFICATION	MAT'L	Q'TY	W/T	REMARK	
TITLE SPEC.	BEVEL HELICAL GEARED		CUSTOMER STANDARD TYPE				
	KB16 HSM						
	OUT LINE DWG						
DRAWN	KSS	SCALE	1 / 1	UNIT	mm		
DESIGN	YHH	DATE	2021.02.04	PROJECTION			
CHECKED		REF. No.			REV		
ARRDVED		DRAWING No.	KOM-KB16-HSM-00-00-00			REV No.	



(주) 케이지엠
KOREA GEARED MOTOR