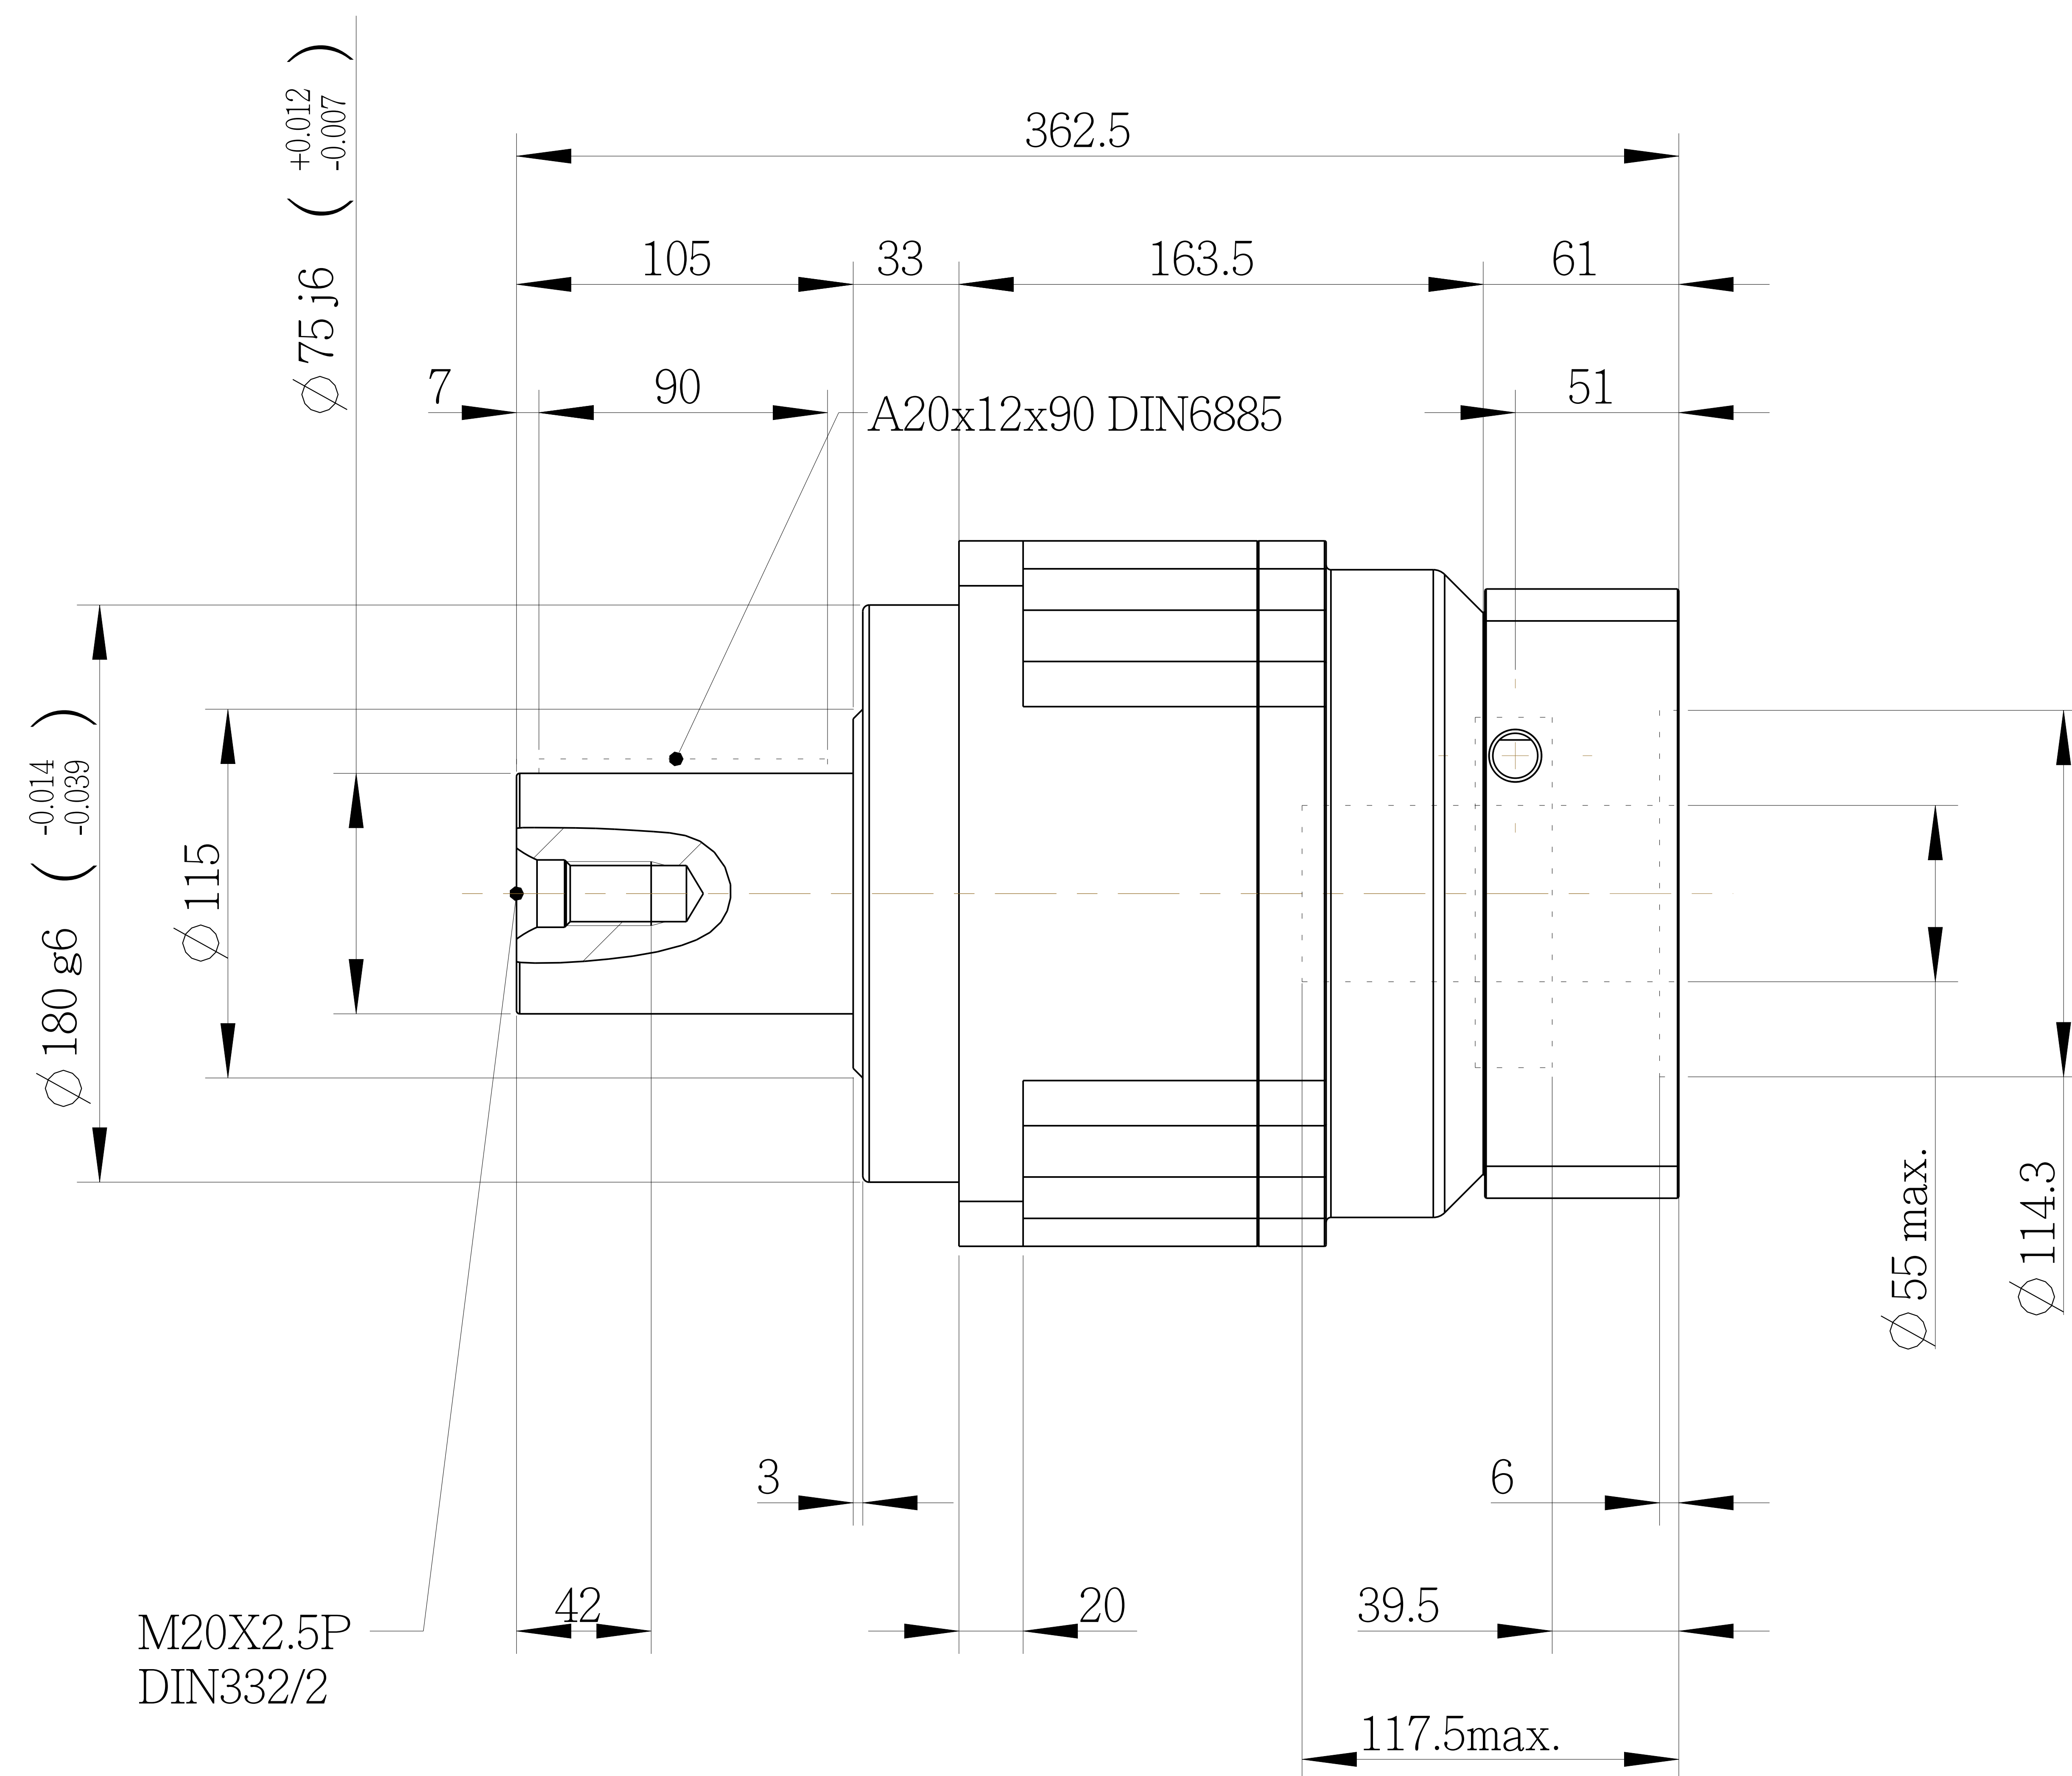
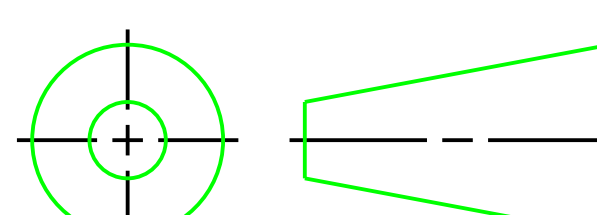


SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)  
SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY  
MICRO BACKLASH<= 1arcmin  
REDUCED BACKLASH<= 3arcmin  
STANDARD BACKLASH<= 5arcmin

BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN  $\phi 55$

|                                                            |      |                                                                                                                     |                 |                  |                |
|------------------------------------------------------------|------|---------------------------------------------------------------------------------------------------------------------|-----------------|------------------|----------------|
| PART NO.<br>AF2201-P0403790008<br>AF220-1, AD-P255-M190-Y8 |      | <div>APEX DYNAMICS, INC.</div> |                 |                  |                |
| APPROVALS                                                  | DATE | TITLE<br><br>AF220 1 STAGE, RATIO= 3~10<br>AND MOTOR FLANGE MOUNTING                                                |                 |                  |                |
| DRAWN<br>陳昱融                                               |      |                                                                                                                     |                 |                  |                |
| CHECKED                                                    |      | DWG NO.<br><br>AF2201-P0403790008                                                                                   |                 |                  |                |
| APPROVED                                                   |      |                                | SIZE<br><br>2A0 | SCALE<br><br>1:1 | REV<br><br>3.0 |