
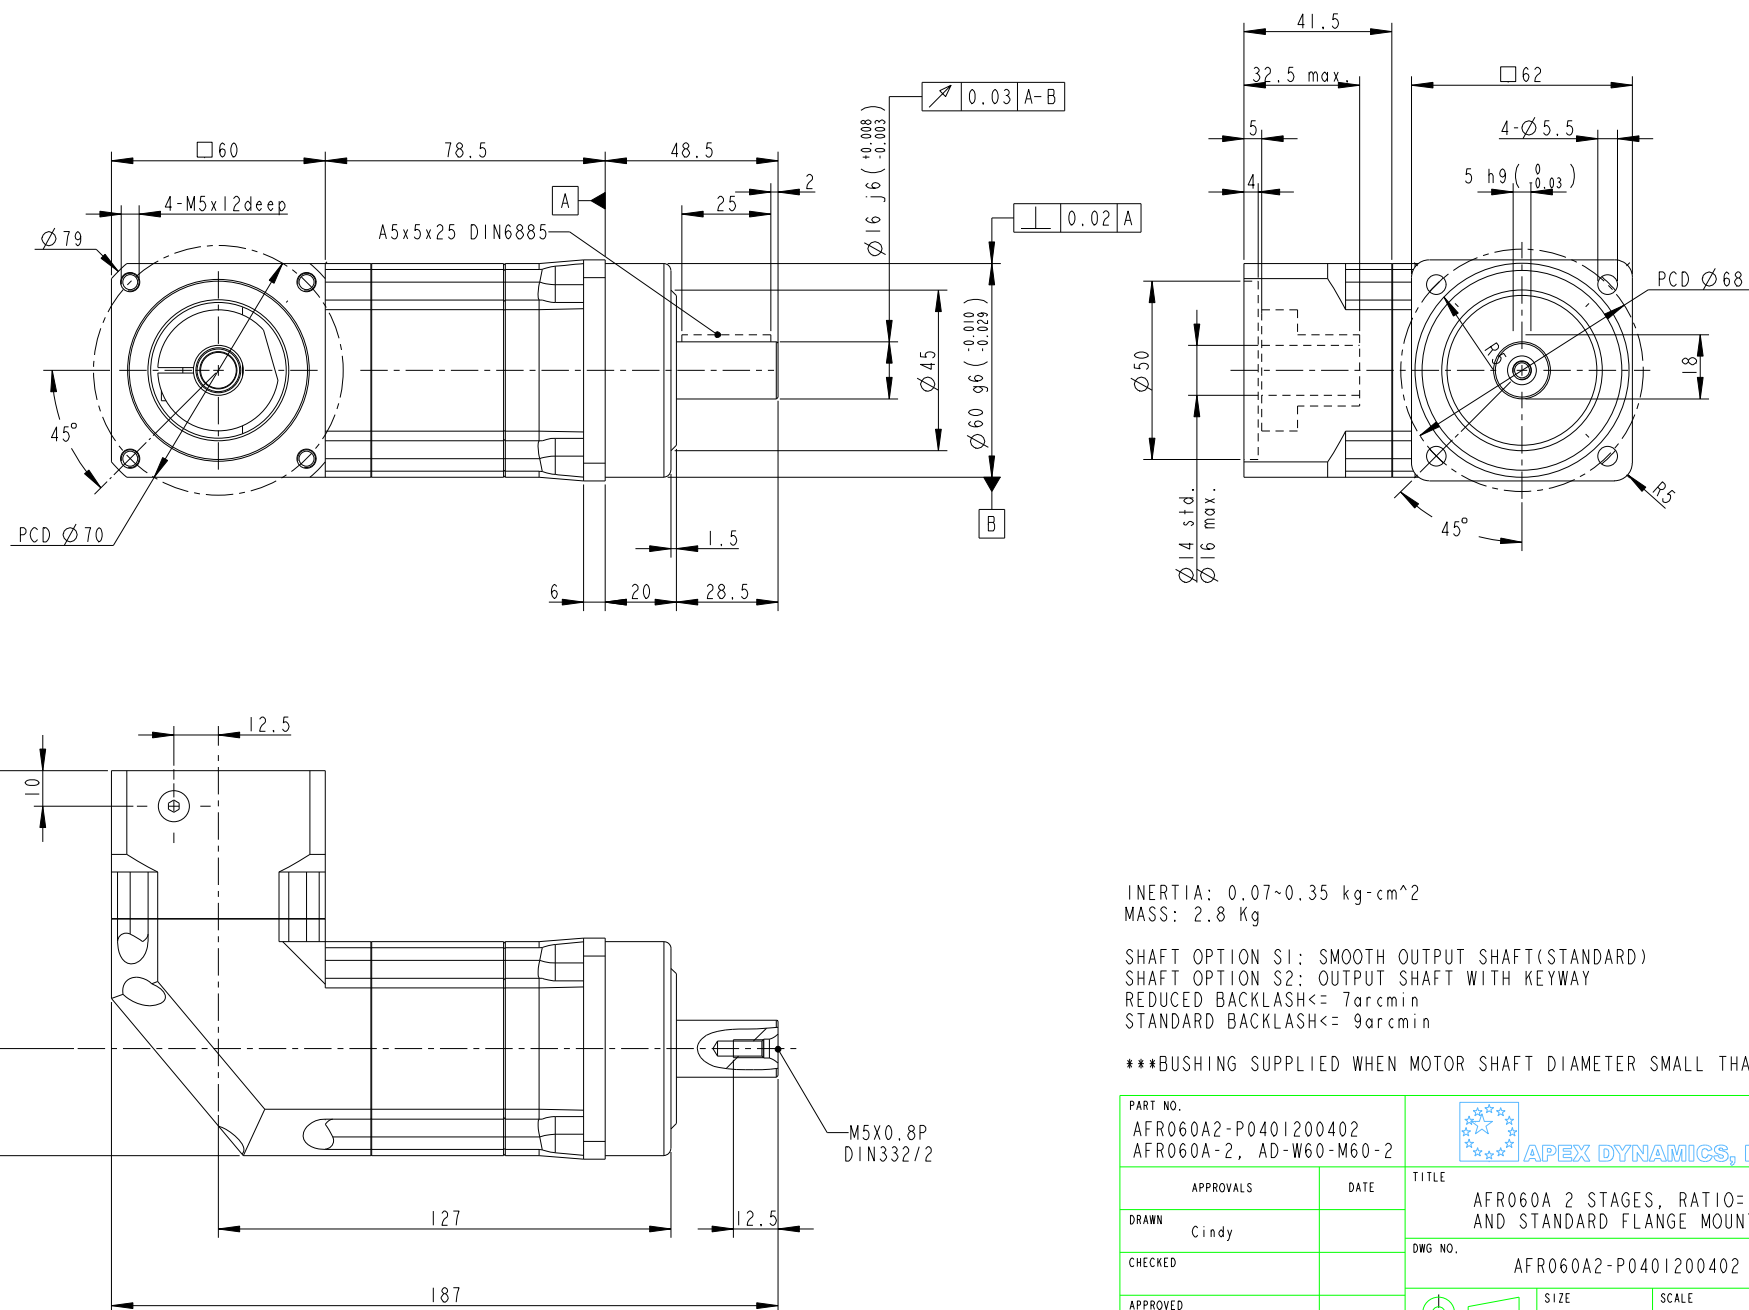




INERTIA: 0.07~0.35 kg-cm²
 MASS: 2.8 Kg

SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)
 SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY
 REDUCED BACKLASH<= 7arcmin
 STANDARD BACKLASH<= 9arcmin

***BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN $\varnothing 14$

PART NO. AFR060A2-P0401200402 AFR060A-2, AD-W60-M60-2		 APEX DYNAMICS, INC.	
APPROVALS	DATE	TITLE AFR060A 2 STAGES, RATIO= 25-200 AND STANDARD FLANGE MOUNTING	
DRAWN Cindy		DWG. NO. AFR060A2-P0401200402	
CHECKED		 SIZE A2 SCALE 1:1 REV 3.0	
APPROVED			