
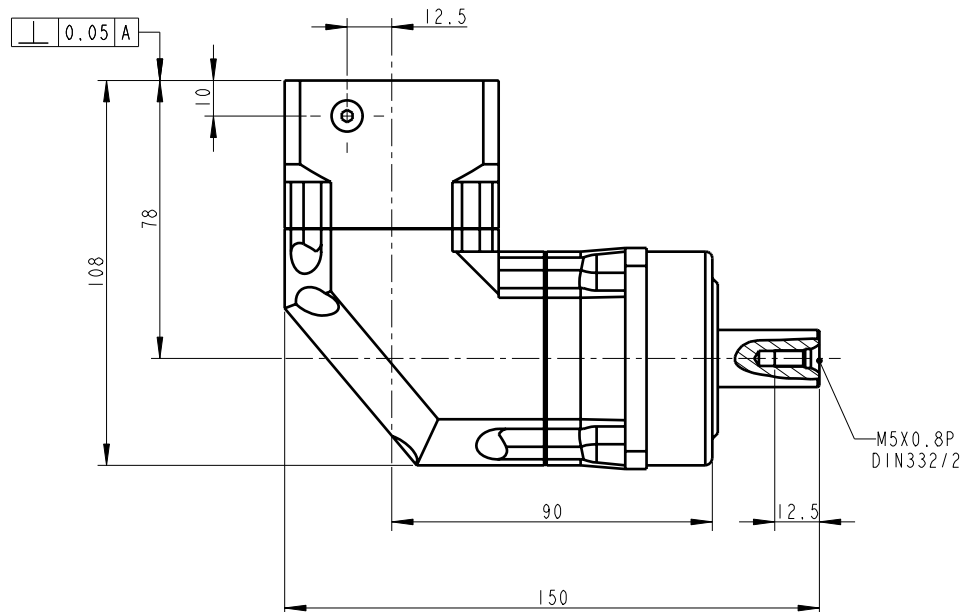


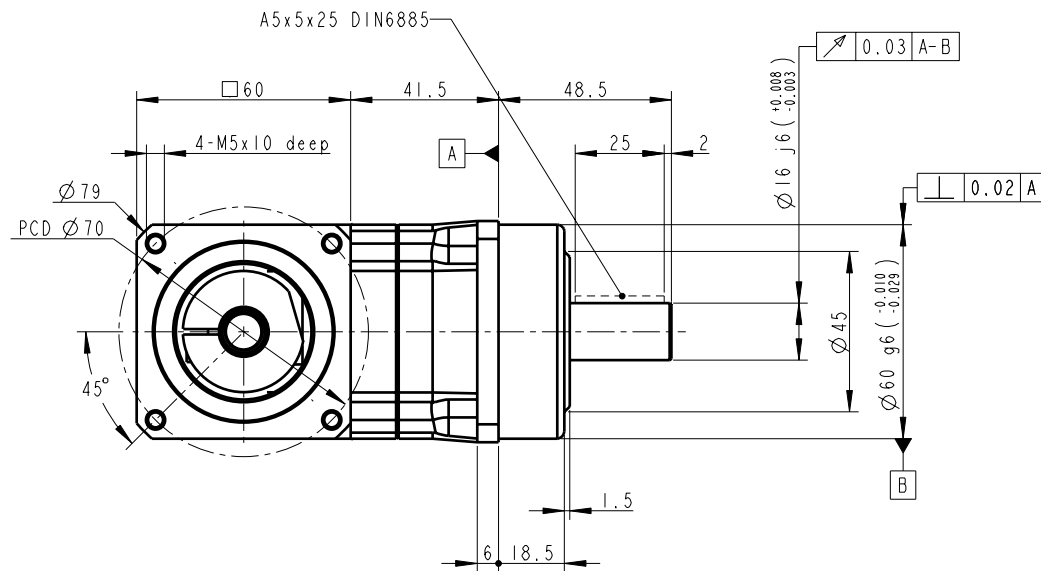


INERTIA: 0.07~0.35 kg-cm²
MASS: 2.1 Kg

SHAFT OPTION S1: SMOOTH OUTPUT SHAFT(STANDARD)
SHAFT OPTION S2: OUTPUT SHAFT WITH KEYWAY
REDUCED BACKLASH<= 4 arcmin
STANDARD BACKLASH<= 6 arcmin

***BUSHING SUPPLIED WHEN MOTOR SHAFT DIAMETER SMALL THAN Ø14

Old Part No. AFR060I-P4020102

PART NO. AFR060I-P0401200402 AFR060-I, AD-W60-M60-2		 APEX DYNAMICS, INC.	
APPROVALS	DATE	TITLE AFR060 1 STAGE, RATIO= 3~20 AND STANDARD FLANGE MOUNTING	
DRAWN Cindy	04-Nov-08		
CHECKED		DWG NO. AFR060I-P0401200402	
APPROVED		 SIZE A2	SCALE 1:1
			REV 3.0